

BNC SERIES RF CO-AXIAL CONNECTORS

Receptacles

Part No.	HRS No.	d	Mounting hole dimensions
UG-290/U(40)	302-0009-2-40	M2.6X0.45	1-10
3C-R(40)	302-0031-1-40	$\phi 3$	1-11

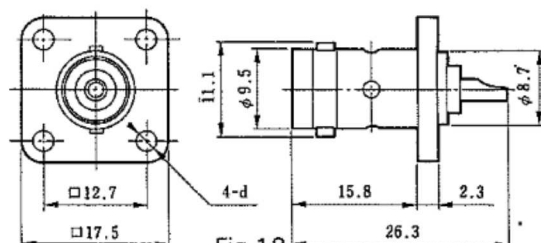


Fig. 18 (reference)

Part No.	HRS No.	Remarks	Mounting hole dimensions
BNC-R-14(40)	302-0245-5-40	Round half cut terminal	1-12

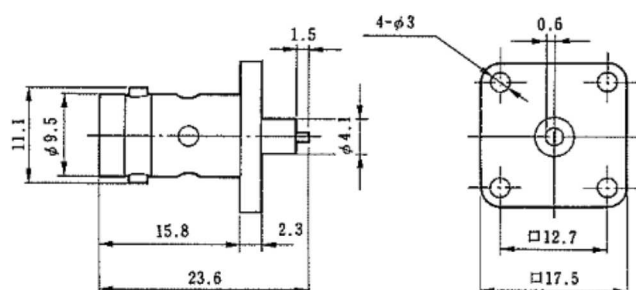


Fig. 20

Part No.	HRS No.	L	ℓ 1	ℓ 2	Remarks	Mounting hole dimensions
BNC-R-12(40)	302-0229-9-40	19.6	0	1.5	Tab terminal	1-12
BNC-R-13(40)	302-0239-2-40	21.6	2.0	1.5	Tab terminal	1-12

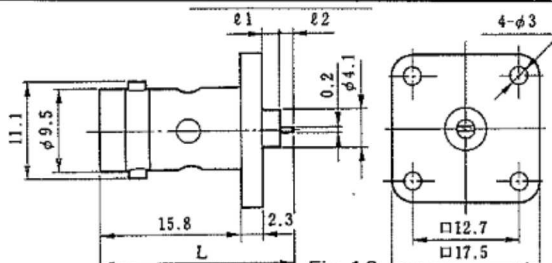


Fig. 19

Part No.	HRS No.	Remarks	Mounting hole dimensions
BNC-LR(40)	302-0020-5-40		1-11

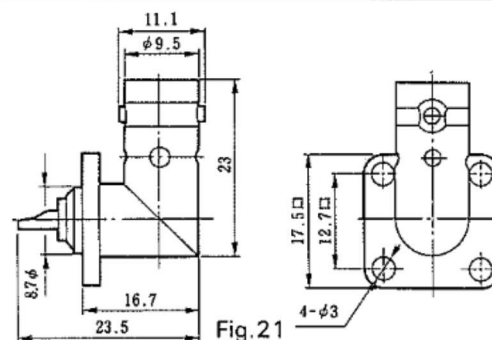


Fig. 21

Part No.	HRS No.	ϕD	L	ℓ	W	Panel mount type	Shape	Mounting hole dimensions
UG-604/U(40)	302-0016-8-40	14.5	26.3	13.7	12.7	2.8	Fig. 25	3-1
UG-625/U(40)	302-0017-0-40	12.7	26.3	12.7	12.7	4	Fig. 25	2-3
UG-625/U-4(40)	302-0221-7-40	12.7	26.3	12.7	12.7	4	Fig. 23	2-3
UG-625/U-10(40)	302-0253-3-40	12.7	21.9	12.7	—	1.3	Fig. 24	3-2
UG-625/U-11A(40)	302-0274-3-40	12.7	24.2	12.7	12.7	4	Fig. 25	2-4
UG-657/U(40)	302-0012-7-40	14.5	32.6	15.2	12.7	5.6	Fig. 25	3-3
UG-657/U-E(40)	302-0080-7-40	14.5	32.6	15.2	12.7	5.6	Fig. 23	3-3
UG-1094/U(40)	302-0178-0-40	12.7	27.0	11.9	12.7	4	Fig. 25	2-4




Fig. 22

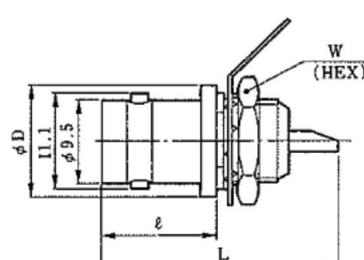


Fig. 23

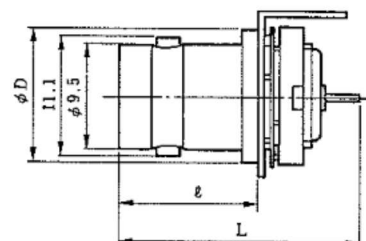


Fig. 24

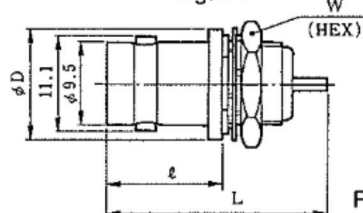


Fig. 25