


Series 800

PLCC Socket

Low Profile Surface Mount Type


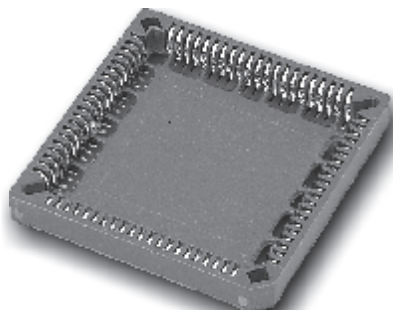


800-841-21



800-281-21

SERIES 800

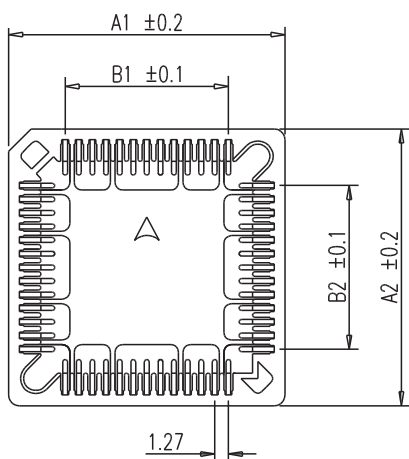

SPECIFICATIONS

技術資料

MATERIAL

- **Insulator:** PPS / Brown, LCP / White
- **Contact:** Phosphor Bronze
- **Finishes:** Tin Plated

ELECTRICAL


- **Contact Resistance:** 30 Ohms Max.
- **Insulation Resistance:** 1000m Ohms Min.
- **Dielectric Strength:** AC 1000V for 1 minute
- **Capacitance:** Less than 1.0pF at 1000Hz
- **Matual:** 1.0nH, Max at 5000KHz

MECHANICAL

- **Operating temperatures:** LCP / -55°C to +125°C

Position	Dimension			
	A1	A2	B1	B2
20	15.58	15.58	5.08	5.08
28	18.12	18.12	7.62	7.62
32	18.12	18.12	7.62	7.62
44	23.20	23.20	12.70	12.70
52	25.74	25.74	15.24	15.24
68	30.82	30.82	20.32	20.32
84	35.90	35.90	25.40	25.40

Unit = mm

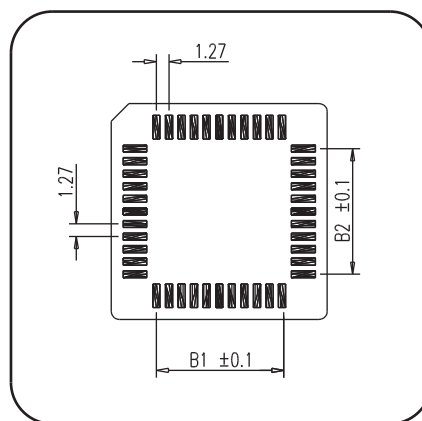

PC Board Layout

HOW TO ORDER 排序整理

8	0	0	-	X	X	X	-	X	X
Series No. 系列編號			No. of Pin 針腳數目		Material		Stand Off		Plating
					1 PPS		1 Without		1 Tin
					2 LCP		2 With		2 Gold