





## ■ Features

- Reliable contact by proprietary contact construction
- Crisp clicking by tactile feedback
- Prevent flux uprise by insert molded terminal
- Ground terminal attached
- Snap-in mount terminal




■ Dimensions (Unit: mm)

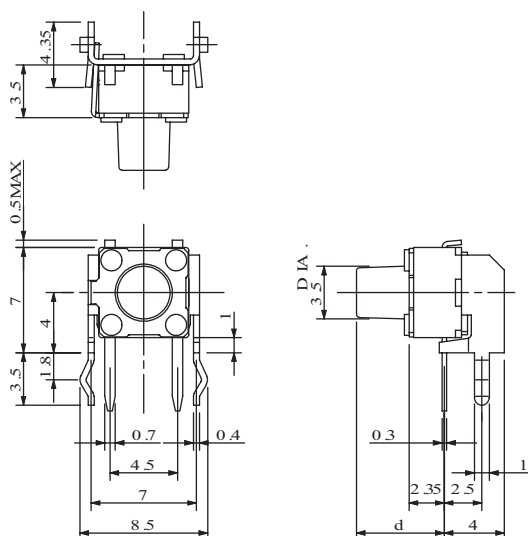

## ■ Specification

| Item                         | Specification                     | Unit | Note   |
|------------------------------|-----------------------------------|------|--------|
| Operating Temperature Range  | -25~+70                           | °C   |        |
| Storage Temperature Range    | -40~+85                           | °C   |        |
| Type of Operation            | Tactile Feedback                  |      |        |
| Contact Configuration        | Push-On Momentary, 1 Pole-1 Throw |      |        |
| Power Rating                 | Max. 50mA 24VDC                   |      |        |
| Contact Resistance           | Max. 100                          | mΩ   |        |
| Insulation Resistance        | 100M Ω Min. at 100VDC             |      |        |
| Dielectric Withstand Voltage | 250 VAC for 1 Minute              |      |        |
| Contact Bounce               | Max. 5                            | ms   |        |
| Operating Force              | 0.98±0.49                         | N    | A Type |
| Operating Force              | 1.57±0.49                         | N    | B Type |
| Operating Force              | 2.55±0.69                         | N    | C Type |
| Return Force                 | Min. 0.10                         | N    | A Type |
| Return Force                 | Min. 0.49                         | N    | B Type |
| Return Force                 | Min. 0.49                         | N    | C Type |
| Travel                       | 0.25 -0.1/+0.2                    | mm   |        |

### ■ Type Designation

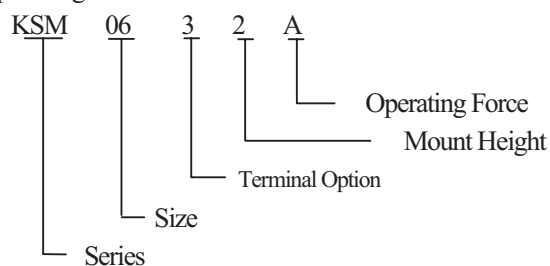

|   | d    |
|---|------|
| 1 | 3.15 |
| 2 | 3.85 |
| 3 | 5.85 |
| 4 | 8.35 |