
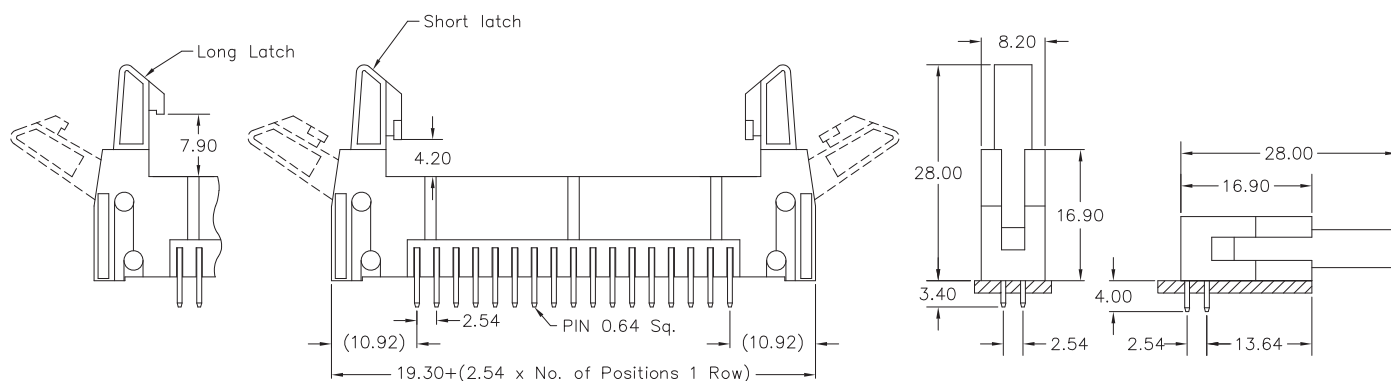
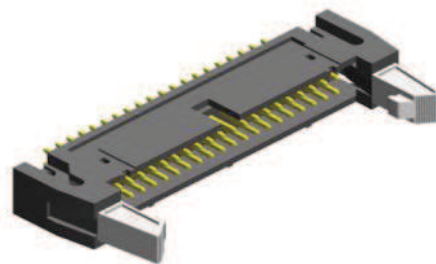


2.54mm pitch

DIN Header (DIN 41651)

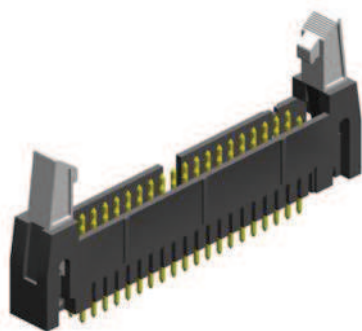

APPLICATION AND FEATURES

Provides fast connection / disconnection of IDC connectors.

Assures reliable flat cable to PC - board assembly.

Optional latching features available.

SPECIFICATIONS

Current rating 3 A
Insulator resistance 1000 MΩ min.
Withstanding voltage 500 V AC

Operating temperature - 40°C to +105°C
Contact material (RoHS compliant) Brass
Insulator material (RoHS compliant) P.B.T. UL 94 V-0 black colour

How to order

DH X - xxx - X 100 - 55

Latch type	Nbr of pins	Style	Pitch	Plating
S = short L = long W = without	010; 012; 014; 016 020; 024; 026; 030 034; 040; 050; 060 064	S = straight R = right angle SMT style available on request	100 = 2.54 / .100 mm/inch	55 = gold Other platings on request