


5.08mm Power Connectors

Disk Drive Power Connection System

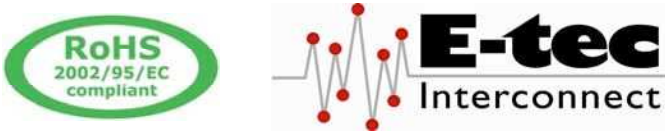

4 Contact Male - Through Board Solder Types	
Straight “T” type Order Code: PCS-104-T508-99	Right angle “T” type Order Code: PCR-104-T508-99
PCB Hole Layout	PCB Hole Layout

SPECIFICATIONS					
Current rating	7 A	Contact resistance	20 mΩ max.	Contact material	Copper alloy
Insulator resistance	1000 MΩ min.	Withstanding voltage	1500 V AC	Insulator material	Nylon UL 94 V-2
Voltage rating	250 V AC max.	Operating temp.	-25°C to +90°C	PCB Thickness	1.60 mm (.063")

How to order

PC X - 104 - T 508 - 99

Type	Plating
R = right angle type S = straight type	99 = tin <i>(leadfree)</i>