


Shrouded with polarization feature

P - Type

female plug

(AWG 20 to 26)

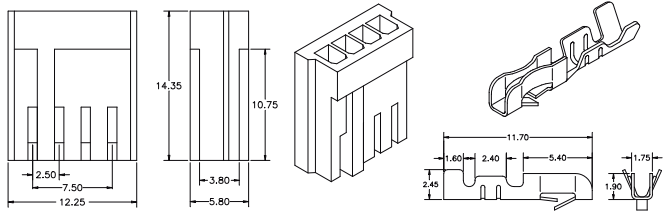


Order Code housing: **CRF-104-P250**

contact: **CRF-999-P250-99**

P - Type

-THT- male

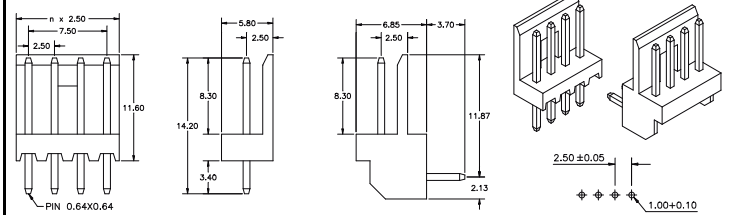

Order Code straight: **CRS-104-P250-99**


right angle: **CRR-104-P250-99**

Friction Lock Header

F - Type

female plug

(AWG 22 to 28)

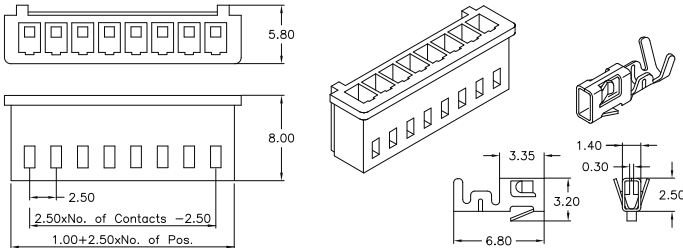


Order Code housing: **CRF-1xx-F250**

contact: **CRF-999-F250-99**

F - Type

-THT- male

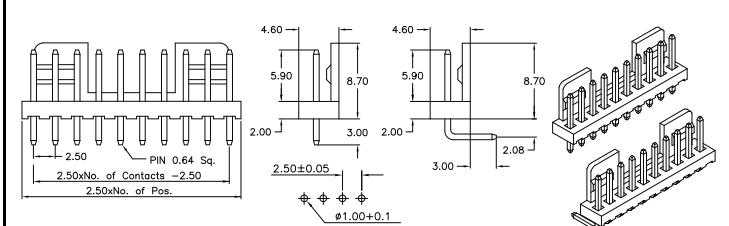

Order Code straight: **CRS-1xx-F250-99**


right angle: **CRR-1xx-F250-99**

Board-lock Type

B - Type

male


(AWG 22 to 28)

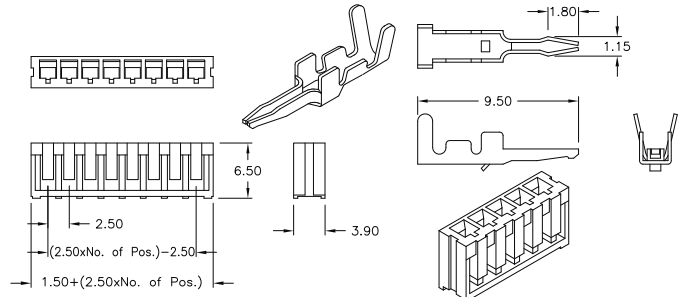

Order Code housing: **CRM-1xx-B250**

contact: **CRM-999-B250-99**

PCB Hole Layout

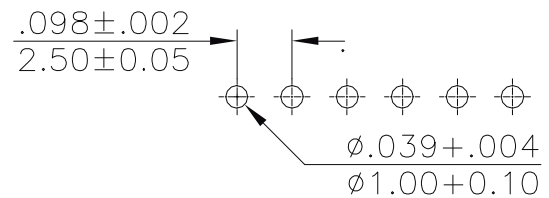

SPECIFICATIONS

Current rating	3 A	Contact resistance	20 mΩ max.	Contact material	Copper alloy
Insulator resistance	1000 MΩ min.	Withstanding voltage	1000 V AC	Insulator material	Nylon UL 94 V-0
Voltage rating	250 V AC max.	Operating temp.	-25°C to +85°C	PCB Thickness	1.60 mm (.063")

How to order

CR X - x xx - X 250 - 99

Type	Rows	Nbr of contacts	Execution	Plating
F = Female R = R/A male S = Straight male M = male contact & header	1 = single row 9 = loose contacts	04 = P - type 02 - 12 = F - type 02 - 16 = B - type (others on request) 99 = loose contacts MOQ: -P250- & -B250- type = 10K / reel -F250- type = 8K / reel	P = P - type F = F - type B = B - type see dwgs above	99 = tin (leadfree) Other platings on request