

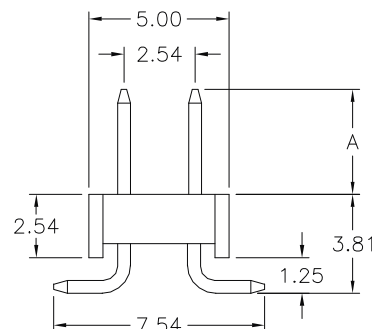


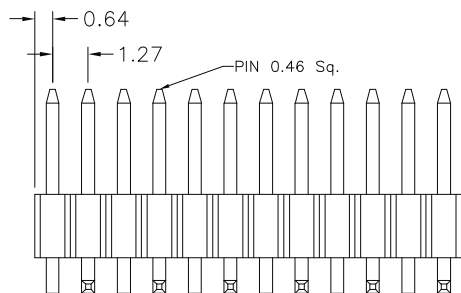



1.27mm - SMT - Pin Header

dual row 1.27mm x 2.54mm



Foot style:

380


381

380


SPECIFICATIONS

Current rating	1 A
Insulator resistance	1000 MΩ min.
Withstanding voltage	500 V AC
Operating temperature	- 40°C to +105°C
Processing temperature	+250°C +0/-5°C for 5sec.
Contact material (RoHS compliant)	Brass
Insulator material (RoHS compliant)	Nylon UL 94 V-0


PCB Surface Mount Layout



Foot style: **380** (single row)



381 (single row)



380 (dual row)

How to order

SS x - xxx - H xxx / x - 55 / 1 X

Rows	Nbr of pins	Foot style	Pin code	DIM "A"	Plating	Packing and "pick & place pad" Option
1 = single row	003 to 050	380 / 0 381 / 0 Pls. choose 380 style if odd pin count.		2.80 mm 2.80 mm	55 = gold Other platings on request	A = tube packing; with pick & place pad B = reel packing; with pick & place pad
2 = dual row	006 to 100	380 / 0 380 / 1 380 / 2 380 / 3 Other dimensions on request		2.80 mm 4.50 mm 5.50 mm 4.80 mm		