


Friction lock

F - Type

female plug

(AWG 18 to 24)

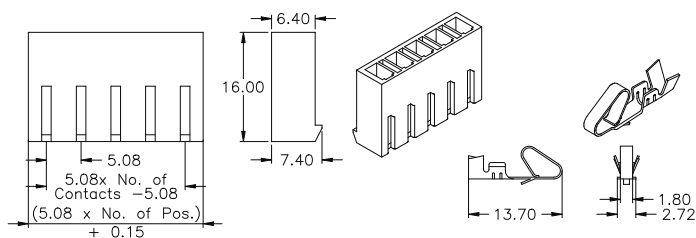


Order Code housing: PCF-1xx-F508

contact: PCF-999-F508-99

F - Type

-THT- male

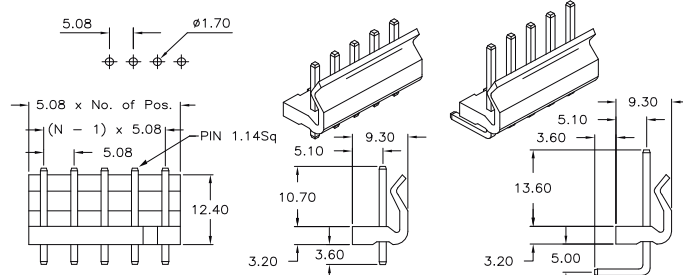


Order Code straight: PCS-1xx-F508-99 right angle: PCR-1xx-F508-99

4 Contact Female Types

P - Type

polarized insulator

(AWG 18 to 20)

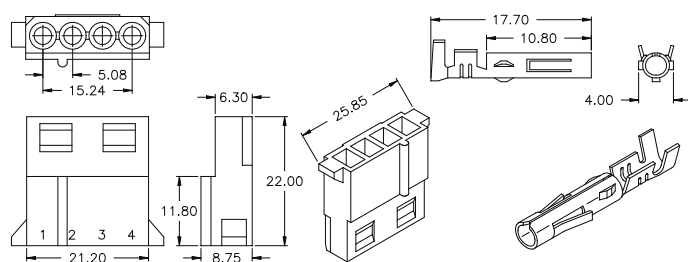


Order Code housing: PCF-104-P508

contact: PCF-999-P508-99

I - Type

IDC - Connector

(AWG 18 to 20)

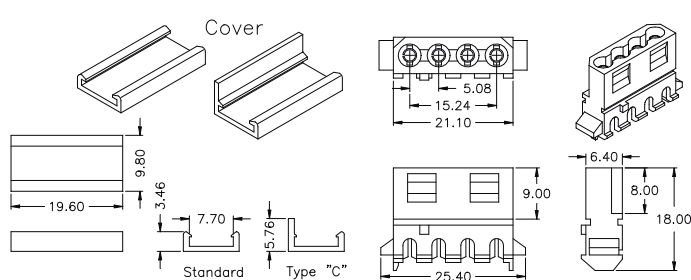


Order Code: with standard Cover PCF-104-I508-99 add /C if type "C" Cover

4 Contact Crimp "shrouded" Male Type

C - Type

(AWG 18 to 22)

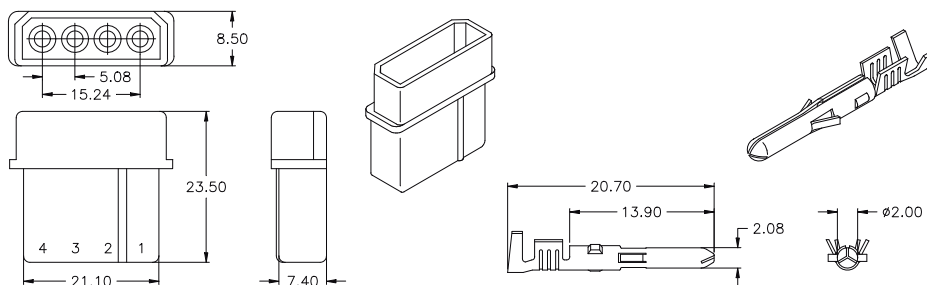

Order Code housing: PCM-104-C508

contact: PCM-999-C508-99

SPECIFICATIONS

Current rating	7 A	Contact resistance	20 mΩ max.	Contact material	Copper alloy
Insulator resistance	1000 MΩ min.	Withstanding voltage	1500 V AC	Insulator material	Nylon UL 94 V-2
Voltage rating	250 V AC max.	Operating temp.	-25°C to +85°C	PCB Thickness	1.60 mm (.063")

How to order

PC X - x xx - X 508 - 99

Type	Rows	Nbr of contacts	Execution	Plating
F = Female R = R/A male S = Straight male M = male contact & header	1 = single row 9 = if contact	02 - 12 = F - type 04 = P, I, C - types 99 = loose contacts MOQ: -F508- type = 6K / reel -P508- type = 7K / reel -C508- type = 7K / reel	F = F - type P = P - type I = I - type C = C - type see drawings above	99 = tin <i>(leadfree)</i> Other platings on request