


Series 850B

Side Entry Modular Jack

PCB Type

(Mates with modular plug conforming to FCC part 68, subpart F)

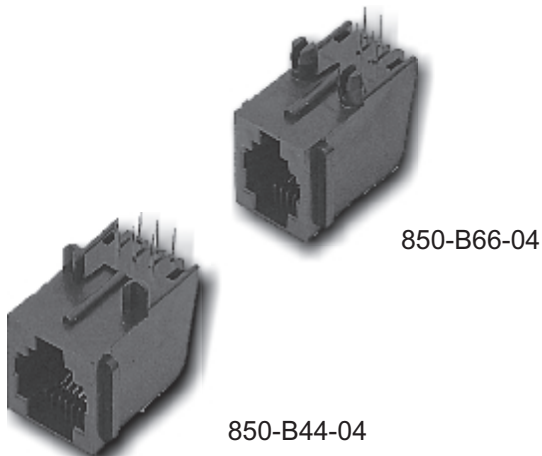

850-B66-04

850-B44-04

SERIES 850-B

SPECIFICATIONS

技術資料

MATERIAL

- **Housing:** Glass Filled Polyester UL 94 V-0
- **Contact:** Phosphor Bronze $\phi 0.46$
- **Plating:** Gold plating over Nickel

ELECTRICAL





- **Voltage Rating:** 125 VAC RMS Min.
- **Current Rating:** 1.5 AMP Min.
- **Contact Rating:** 30 Mini Ω Max.
- **Insulation Resistance:** 500 Meg Ω Min. at 500V DC.
- **Dielectric Strength:** 1000 VAC RMS 60Hz, 1Min.
- **Operating Life:** 250 Cycles Min.
- **PCB Retention pre-solder:** 1 LB Min.
- **PCB Retention Post-solder:** 10 LBS Min.

MECHANICAL

- **Storage:** -40°C to $+85^{\circ}\text{C}$
- **Operation:** 0°C to 70°C

Position	Dimension			
	A	B	C	D
4	13.72	11.18	7.62	3.81
6	15.75	13.21	10.16	6.35
8	17.78	15.24	11.43	8.89

Unit = mm

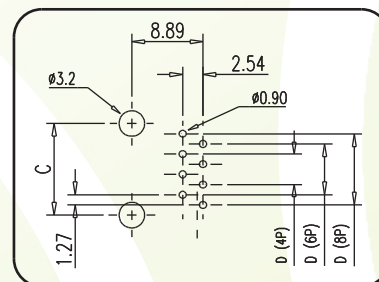

PC Board Layout

KARSON
TECHNOLOGY

HOW TO ORDER 排序整理

8	5	0	-	B	X	X	-	0	X
Series No. 系列編號		No. of Position		No. of Contact		Plating			
						1	15 μ "		
						2	30 μ "		
						3	50 μ "		
						4	6 μ "		

All Specification changes without prior notice