

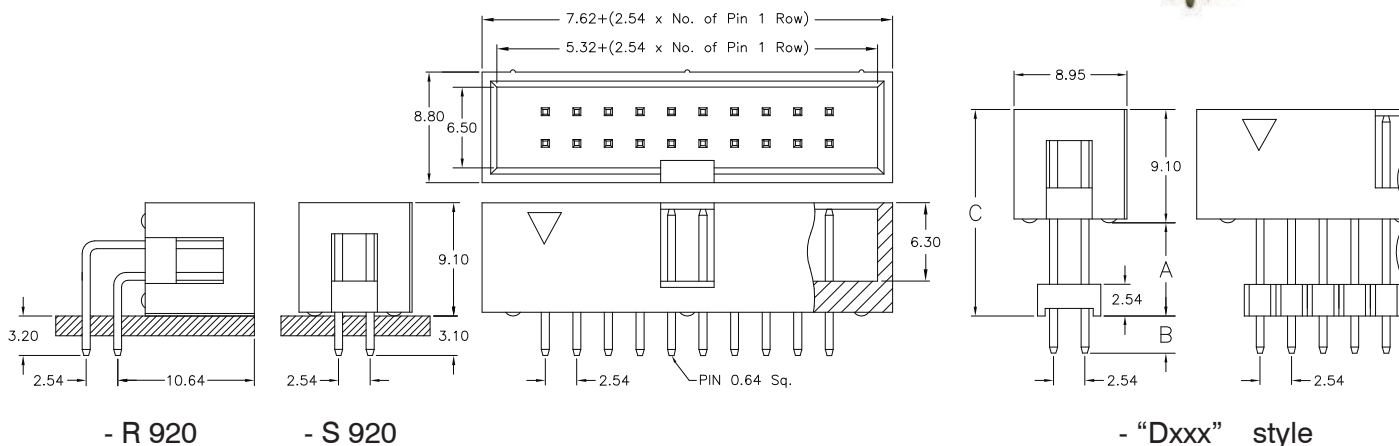






#### APPLICATION AND FEATURES

- Mating devices for female headers, solder tail and IDC Type
- Reliable flat cable to PCB connection
- No ejection latches for space saving

#### PCB Hole Layout

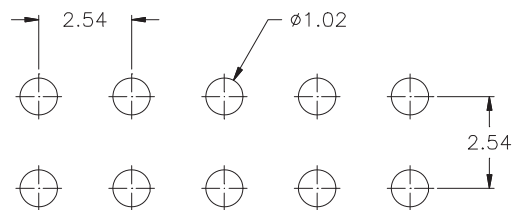

#### SPECIFICATIONS

|                      |              |                       |                                   |
|----------------------|--------------|-----------------------|-----------------------------------|
| Current rating       | 3 A          | Operating temperature | - 40°C to +105°C                  |
| Insulator resistance | 1000 MΩ min. | Contact material      | (RoHS compliant) Brass            |
| Withstanding voltage | 500 V AC     | Insulator material    | (RoHS compliant) P.B.T. UL 94 V-0 |

#### How to order

SLS - xxx - X xxx - 55

| Nbr of pins                                                                                                                          | Style                                               | Pin code for<br>“Dxxx” =<br>raised style | DIM "A"<br>(mm) | DIM "B"<br>(mm) | DIM "C"<br>(mm) | Plating                                              |
|--------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------|------------------------------------------|-----------------|-----------------|-----------------|------------------------------------------------------|
| <b>S &amp; R Version:</b><br><b>006; 008; 010; 012; 014; 016</b><br><b>020; 024; 026; 030; 034; 040</b><br><b>044; 050; 060; 064</b> | <b>S920</b> = straight<br><b>R920</b> = right angle | <b>141</b>                               | 5.00            | 3.00            | 14.10           | <b>55</b> = gold<br><br>Other platings<br>on request |
|                                                                                                                                      |                                                     | <b>166</b>                               | 7.50            | 3.00            | 16.60           |                                                      |
|                                                                                                                                      |                                                     | <b>232</b>                               | 14.10           | 3.00            | 23.20           |                                                      |
|                                                                                                                                      |                                                     | <b>235</b>                               | 14.40           | 3.00            | 23.50           |                                                      |
|                                                                                                                                      |                                                     | Other dimensions on request              |                 |                 |                 |                                                      |
| <b>D Version</b><br><b>006; 008; 010; 012; 014; 016</b><br><b>020; 024; 026; 030; 034; 040</b><br><b>050; 060; 064</b>               | <b>Dxxx</b> = raised style                          |                                          |                 |                 |                 |                                                      |