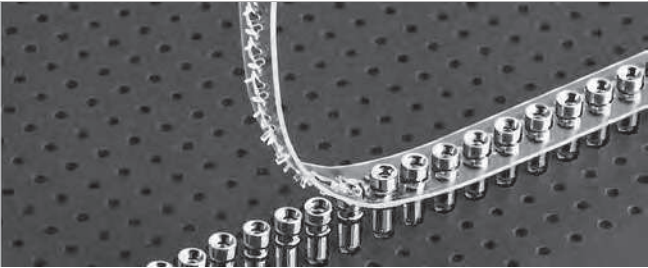
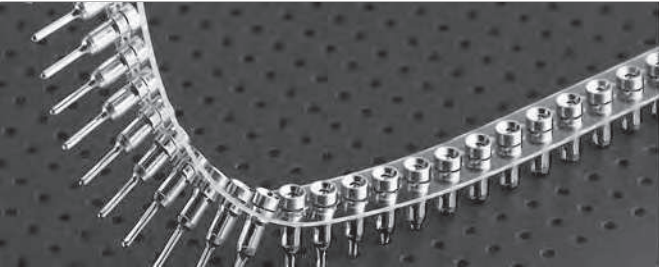




Female headers

Peel-Off



- precision contacts are mounted in a temperature-resistant carrier strip which is removed after soldering
- special loadings upon request

art. no.				
PO A ... G				
please indicate:	... no. of contacts from 2 pins to endless			
contact sleeve:	gold-plated			
contact spring:	gold-plated			
annotation:	<b>Technical data of carrier foil:</b> max. tensile strength: 193 N/mm <sup>2</sup> max. thermal expansion - longitudinal direction: 1.7x10 <sup>-5</sup> mm/°C melting point: 250°C			