


Series 760

IDC Connector

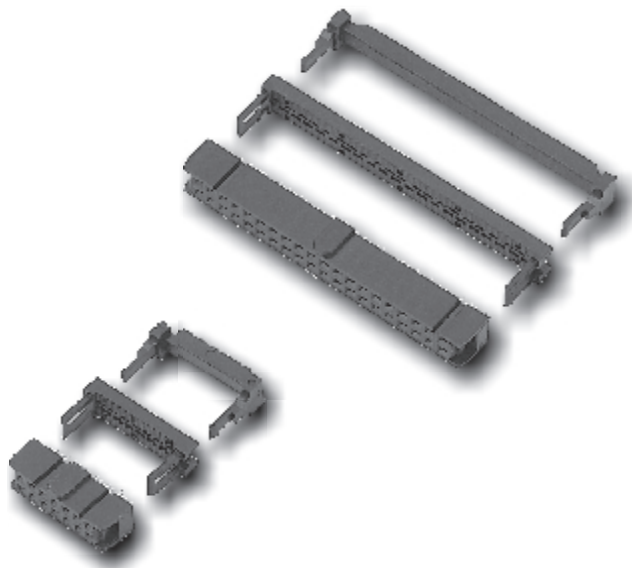

SPECIFICATIONS

技術資料

MATERIAL

- **Insulator:** PBT +30% Glass Fiber (UL 94 V-0)
- **Contact:** Phosphor Bronze or Brass
- **Contact Plated:** Gold over Nickel or Tin




ELECTRICAL

- **Current Rating:** 1A
- **Insulation Resistance:** 1000mΩMin. at DC 500V
- **Contact Resistance:** 12mΩMax. at 6V DC 0.3A
- **Cable Size:** 1.27m/m(0.05") Pitch AWG 28 or 30

MECHANICAL

- **Operating temperature:** -55°C to +150°C

SERIES 730 (STRAIGHT)

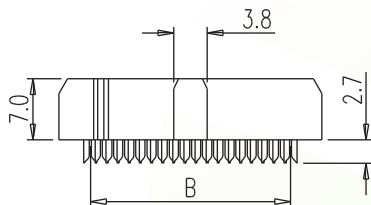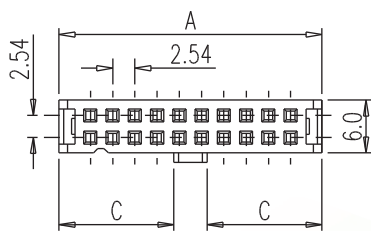

Protector

Strain Relief

No. of Contacts	Dimension		
	A	B	C
10	17.27	10.16	6.74
14	22.35	15.24	9.28
16	24.89	17.78	10.55
20	29.97	22.86	13.09
26	37.59	30.48	16.90
30	42.67	35.56	19.44
34	47.75	40.64	21.98
40	55.37	48.26	25.79
50	68.07	60.96	32.14
60	80.77	73.66	38.49
64	85.85	78.74	41.03

Unit = mm

HOW TO ORDER 排序整理

7	6	0	-	X	X	X	-	X	0
Series No. 系列編號			No. of Pin 針腳數目		Color		Strain Relief		
					1 Grey		0 Without		
					2 Black		1 With		