

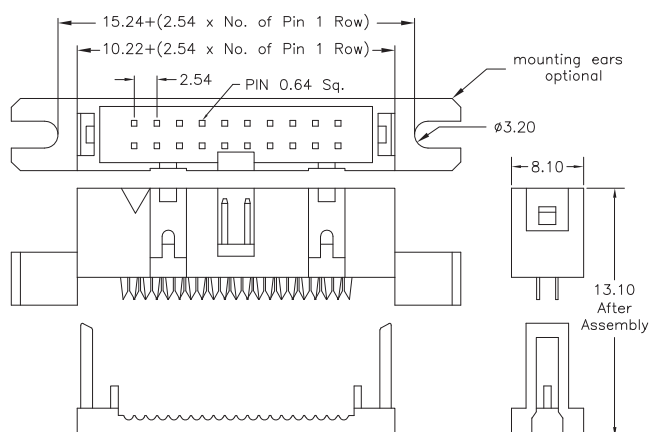
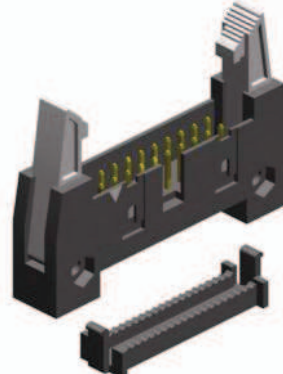


2.54mm pitch

IDC Shrouded Header

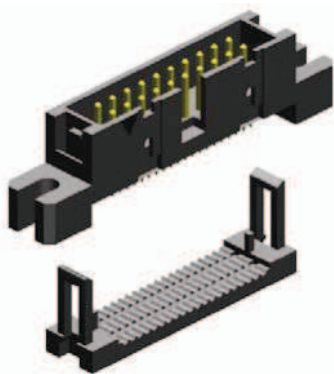

IDH Type

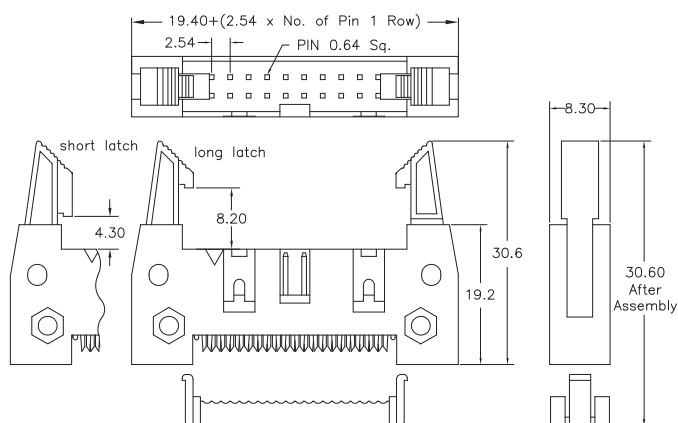

IDD Type

SPECIFICATIONS

Current rating	3 A	Operating temperature	- 40°C to +105°C
Insulator resistance	1000 MΩ min.	Contact material	(RoHS compliant) Phosphor bronze
Withstanding voltage	500 V AC	Insulator material	(RoHS compliant) P.B.T. gray UL 94 V-0

APPLICATION AND FEATURES

Designed to mate with 2.54mm IDC female headers.
Header type is available with or without mounting ears.
DIN Header type is available with long & short eject latches.
Standard Insulator colour gray, other colours on request

How to order

ID X - xxx - X 100 - 95

Types	Nbr of pins	Executions	Plating
H = Header	010; 014; 016; 020 024 (only available for IDD Type)	IDH W = w/o ears E = with ears	95 = tin/gold (tin leadfree)
D = DIN Header (DIN 41 651)	026; 030; 034; 040 050; 060; 064	IDD L = long latch S = short latch	Other platings on request