
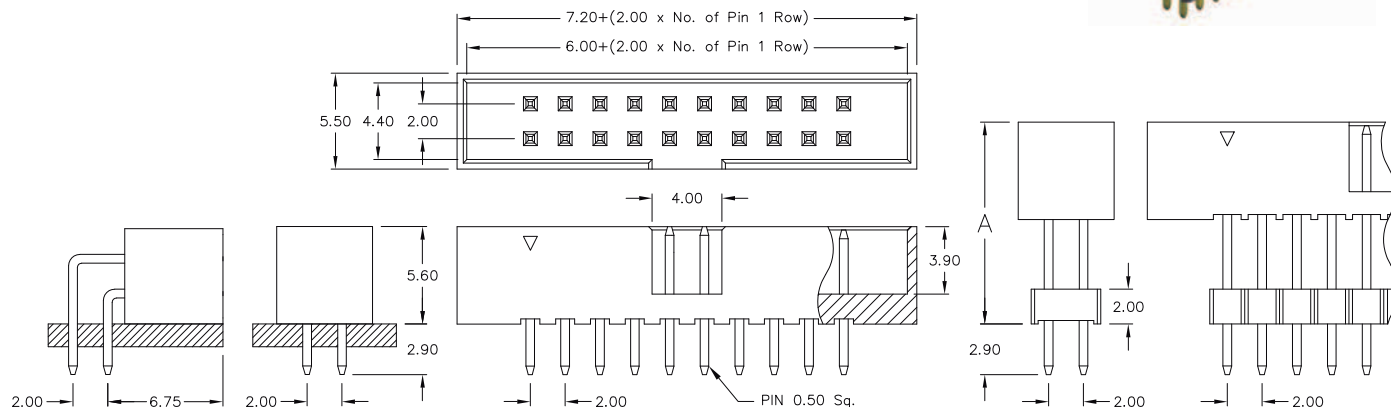




2.00mm pitch Box Header

- THT - right angle - straight - raised



- R 562


- S 562

- D 762/xx

APPLICATION AND FEATURES

- Designed to mate with IDC female connector IDS-xxx-X 200-95/P
- Reliable flat cable to PCB connection
- No ejection latches for space saving

PCB Hole Layout

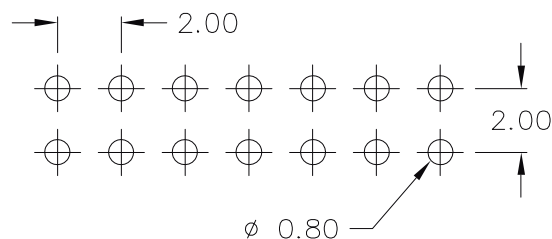

SPECIFICATIONS

Current rating	1 A	Operating temperature	- 40°C to +105°C
Insulator resistance	1000 MΩ min.	Contact material	(RoHS compliant) Copper alloy
Withstanding voltage	500 V AC	Insulator material	(RoHS compliant) Nylon UL 94 V-0

How to order

SLS - xxx - X xxx - 55 /2

Nbr of pins
006 to 068
except: 038; 042; 046; 048; 052 054; 056; 058; 062; 066

Style
S 562 = straight
R 562 = right angle
<u>Raised style:</u>
D 762/00 DIM "A" = 7.60 mm
D 762/01 DIM "A" = 17.80 mm
Other dimensions on request

Plating
55 = gold
Other platings on request