


APPLICATION AND FEATURES

- **Standard:**
without locating pegs, tray packing and without "pick & place pad"
- Also available "tape & reel" packing
- Designed to mate with IDC female connector IDS-xxx-X 200-95/P
- Reliable flat cable to PCB connection
- No ejection latches for space saving

PCB Surface Mount Layout

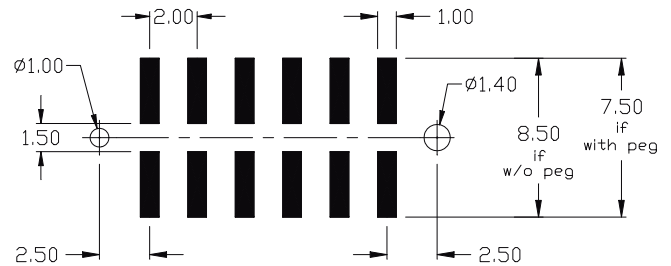

SPECIFICATIONS

Current rating	1 A
Insulator resistance	1000 MΩ min.
Withstanding voltage	500 V AC

Operating temperature	- 40°C to +105°C
Processing temperature	+250°C +0/-5°C for 5sec.
Contact material	(RoHS compliant) Copper Alloy
Insulator material	(RoHS compliant) Nylon UL 94 V-0

How to order

SLS - xxx - H 562 - 55 /2 X

Nbr of pins
without "locating pegs" 006 to 068
except: 038; 042; 046; 048 052; 054; 056; 058 062; 066
with "locating pegs" 008 to 050

Plating
55 = gold
Other platings on request

Packing and "pick & place pad" Option
without "locating pegs"
F = tray packing; with pick & place pad
T = tube packing; without pick & place pad
A = tube packing; with pick & place pad
B = reel packing; with pick & place pad
with "locating pegs"
C = tube packing; without pick & place pad
D = tube packing; with pick & place pad
E = reel packing; with pick & place pad