


## EN60 320-2-2 Standard Sheet F Class I Shuttered

## SNAP FIT TO PANEL OUTLET



- Shuttered
- Panel Sizes 1, 1.5, 2.0 or 3.0mm
- 2.8, 4.8 or 6.3mm Tabs
- 10A, 250V a.c.  
(15A, 250V a.c. UL & CSA)

PX0783/10/28

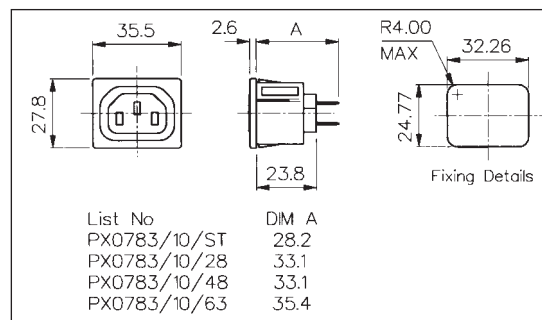


## FLANGE MOUNT OUTLET



- Shuttered
- 2.8, 4.8 or 6.3mm Tabs
- 10A, 250V a.c.  
(15A, 250V a.c. UL & CSA)

PX0793/28

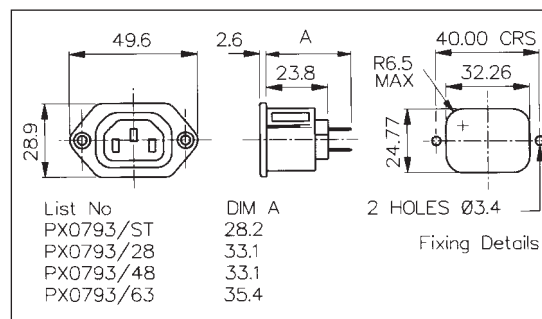


## RECTANGULAR FLANGE MOUNT OUTLET



- Shuttered
- Rectangular Flange Mount Outlet
- 2.8, 4.8 or 6.3mm Tabs
- 10A, 250V a.c.  
(15A, 250V a.c. UL & CSA)

PX0793/1/Termination

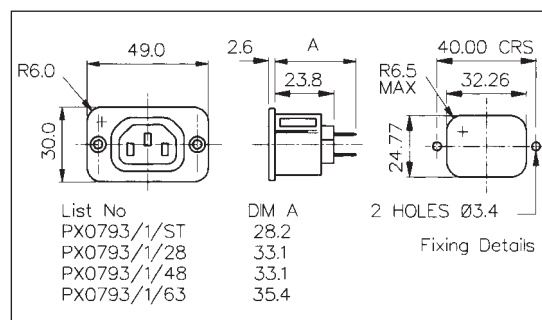

| Specification          | PX0783/Panel/Term/Col                                              | PX0793/Term/Col                                                    | PX0793/1/Term/Col                                                  |
|------------------------|--------------------------------------------------------------------|--------------------------------------------------------------------|--------------------------------------------------------------------|
| Fixing:                | Snap fit, /10 (1mm), /15 (1.5mm), /20 (2mm), /30 (3mm)             | Flange                                                             | Rectangular Flange                                                 |
| Terminations:          | /28 (2.8mm solder), /48 (4.8mm tab), /63 (6.3mm tab), /ST (solder) | /28 (2.8mm solder), /48 (4.8mm tab), /63 (6.3mm tab), /ST (solder) | /28 (2.8mm solder), /48 (4.8mm tab), /63 (6.3mm tab), /ST (solder) |
| Colours:               | /WH (White), /GY (Grey)                                            | /WH (White), /GY (Grey)                                            | /WH (White), /GY (Grey)                                            |
| Max. Rating:           | 10A, 250V a.c.<br>(UL & CSA 15A, 250V a.c.)                        | 10A, 250V a.c.<br>(UL & CSA 15A, 250V a.c.)                        | 10A, 250V a.c.<br>(UL & CSA 15A, 250V a.c.)                        |
| Contact Resistance:    | <10mΩ                                                              | <10mΩ                                                              | <10mΩ                                                              |
| Insulation Resistance: | >10 <sup>4</sup> MΩ                                                | >10 <sup>4</sup> MΩ                                                | >10 <sup>4</sup> MΩ                                                |
| A.C. Breakdown:        | Pole-Pole 7kV. Poles-Panel 9kV                                     | Pole-Pole 7kV. Poles-Panel 9kV                                     | Pole-Pole 7kV. Poles-Panel 9kV                                     |
| Operating Temp. Range: | -40°C to +70°C                                                     | -40°C to +70°C                                                     | -40°C to +70°C                                                     |
| Mouldings:             | Nylon, Flammability Rating UL 94V-0                                | Nylon, Flammability Rating UL 94V-0                                | Nylon, Flammability Rating UL 94V-0                                |
| Contacts:              | Brass, Tin Plated                                                  | Brass, Tin Plated                                                  | Brass, Tin Plated                                                  |
| Approvals:             | (Approvals do not cover 4.8mm tab option)                          | (Approvals do not cover 4.8mm tab option)                          | (Approvals covers /ST version only)                                |
| Accessories / Notes:   | P.No. 12075 (See Page 67)                                          | P.No. 12075, KT0006 (See Pages 66-67)                              | P.No. 12075, KT0006 (See Pages 66-67)                              |
| Mates with:            | PX0685, PX0686, PX0686/SE, PZ0500, PZ0600                          | PX0685, PX0686, PX0686/SE, PZ0500, PZ0600                          | PX0685, PX0686, PX0686/SE, PZ0500, PZ0600                          |