


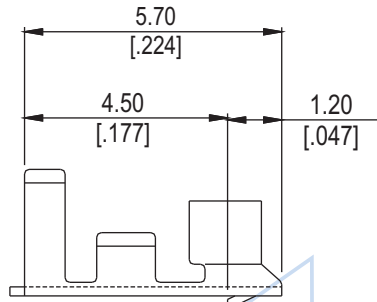




.079" (2.00mm) Connector

110T Crimp Terminal

- * Material : Phosphor bronze or Brass
- * Finish : Plated Tin or Plated Gold
- * Electrical rating 125V 1A, AC/DC
- * Applicable wire AWG #30- #26
- * Used in H110 series housings
- * Q'ty/reel : 10,000




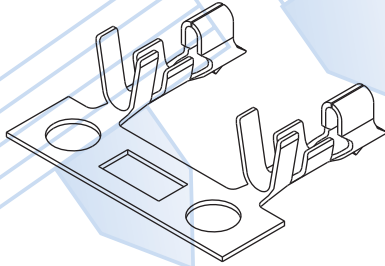


G
.079"/2.00mm

mm
[inch]

H110 Series Receptacle Housings

- * Material : Nylon UL 94V-0 or UL 94V-2
- * Standard color : White
- * Electrical rating : 125V 1A, 1AC/DC
- * Accepts 110T terminal
- * Mates with P110I, P110L, H110P1, P110I-D, P110I-SMT, P110L-SMT series headers
- * 2-16 circuits available

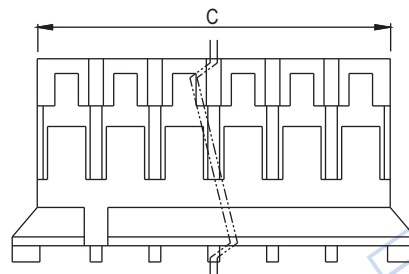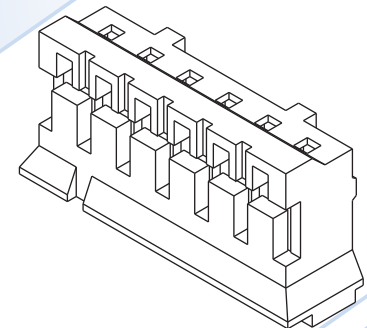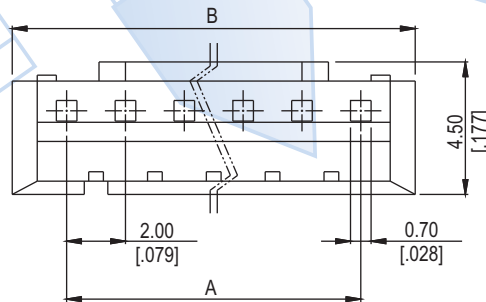

UL
E118260

SP
LR82315

Dimensional information - mm/inch(H110)

Circuits	Dim. A		Dim. B		Dim. C		Circuits	Dim. A		Dim. B		Dim. C	
	inch	mm	inch	mm	inch	mm		inch	mm	inch	mm	inch	mm
2	0.079	2.00	0.224	5.70	0.181	4.60	10	0.709	18.00	0.854	21.70	0.811	20.60
3	0.157	4.00	0.303	7.70	0.260	6.60	11	0.787	20.00	0.933	23.70	0.890	22.60
4	0.236	6.00	0.382	9.70	0.339	8.60	12	0.866	22.00	1.012	25.70	0.969	24.60
5	0.315	8.00	0.461	11.70	0.417	10.60	13	0.945	24.00	1.091	27.70	1.047	26.60
6	0.394	10.00	0.539	13.70	0.496	12.60	14	1.024	26.00	1.169	29.70	1.126	28.60
7	0.472	12.00	0.618	15.70	0.575	14.60	15	1.102	28.00	1.248	31.70	1.205	30.60
8	0.551	14.00	0.697	17.70	0.654	16.60	16	1.181	30.00	1.327	33.70	1.283	32.60
9	0.630	16.00	0.776	19.70	0.732	18.60							