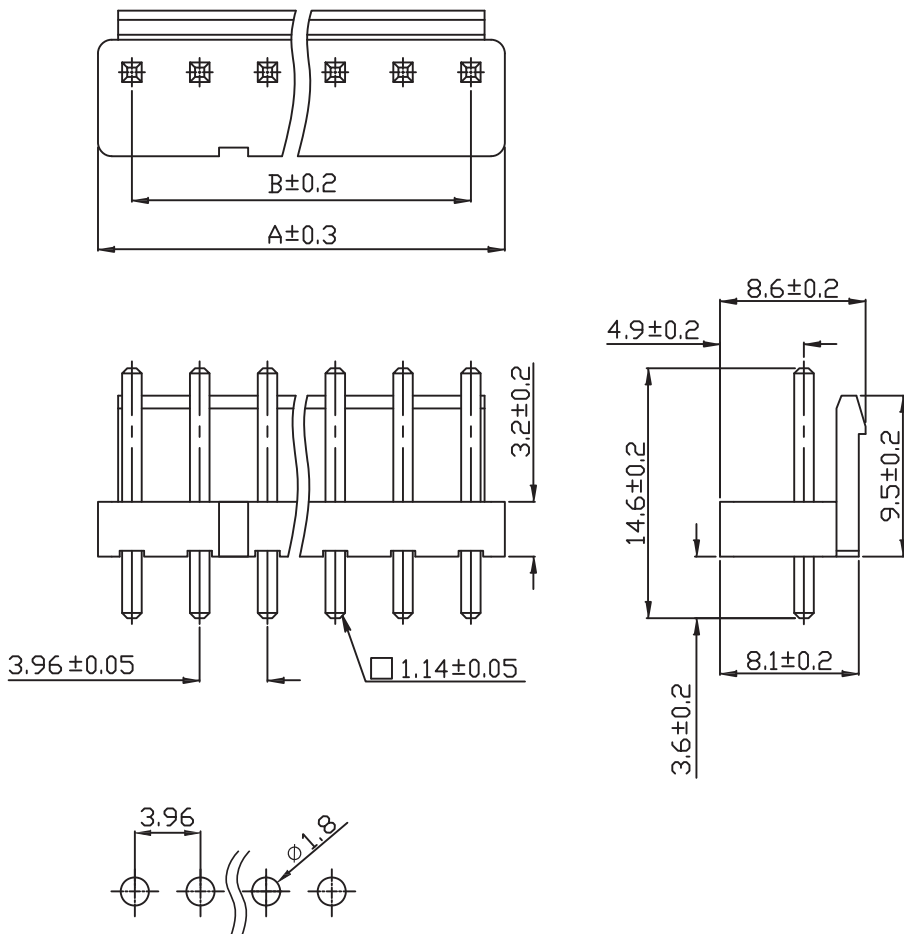



Pin header					Technical data:																																																
					Insulating material:	Nylon 66, UL 94V-0																																															
					Contact material:	Brass																																															
					Plating:	Tin																																															
					Rated current:	5 Amp.																																															
					Rated voltage:	250 V _{RMS} /V _{DC}																																															
					Withstand voltage:	1500 V _{AC} for one minute																																															
					Operating temperature:	-25°C to +85°C																																															
					Soldering temperature:	220°C																																															
pitch	rows	row distance	orientation	termination																																																	
3,96	1		straight	through hole																																																	
 <table><tr><th rowspan="2">Pincount</th><th colspan="2">Dimensions</th></tr><tr><th>A</th><th>B</th></tr><tr><td>002</td><td>7.92</td><td>3.96</td></tr><tr><td>003</td><td>11.88</td><td>7.92</td></tr><tr><td>004</td><td>15.84</td><td>11.88</td></tr><tr><td>005</td><td>19.80</td><td>15.84</td></tr><tr><td>006</td><td>23.76</td><td>19.80</td></tr><tr><td>007</td><td>27.72</td><td>23.76</td></tr><tr><td>008</td><td>31.68</td><td>27.72</td></tr><tr><td>009</td><td>35.64</td><td>31.68</td></tr><tr><td>010</td><td>39.60</td><td>35.64</td></tr><tr><td>011</td><td>43.56</td><td>39.60</td></tr><tr><td>012</td><td>47.52</td><td>43.56</td></tr><tr><td>013</td><td>51.48</td><td>47.52</td></tr><tr><td>014</td><td>55.44</td><td>51.48</td></tr><tr><td>015</td><td>59.40</td><td>55.44</td></tr></table>							Pincount	Dimensions		A	B	002	7.92	3.96	003	11.88	7.92	004	15.84	11.88	005	19.80	15.84	006	23.76	19.80	007	27.72	23.76	008	31.68	27.72	009	35.64	31.68	010	39.60	35.64	011	43.56	39.60	012	47.52	43.56	013	51.48	47.52	014	55.44	51.48	015	59.40	55.44
Pincount	Dimensions																																																				
	A	B																																																			
002	7.92	3.96																																																			
003	11.88	7.92																																																			
004	15.84	11.88																																																			
005	19.80	15.84																																																			
006	23.76	19.80																																																			
007	27.72	23.76																																																			
008	31.68	27.72																																																			
009	35.64	31.68																																																			
010	39.60	35.64																																																			
011	43.56	39.60																																																			
012	47.52	43.56																																																			
013	51.48	47.52																																																			
014	55.44	51.48																																																			
015	59.40	55.44																																																			
 Pincount: see table Plating: T = Sn																																																					
Order code:		580-1-XXX-0-T-BS0																																																			