
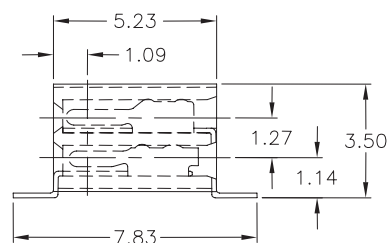
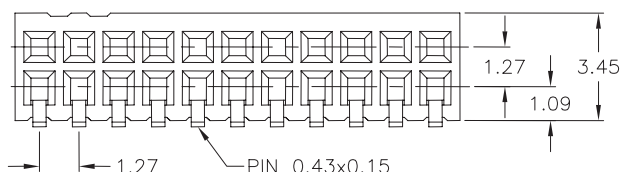
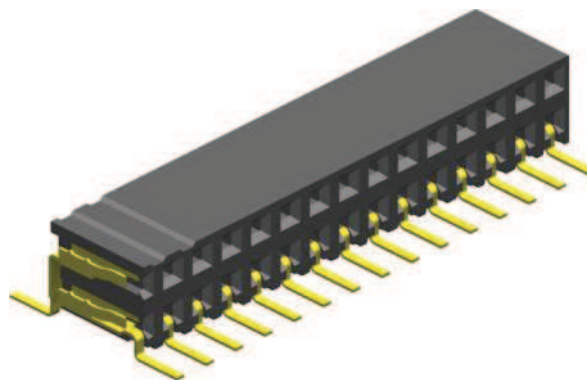


1.27mm pitch Female Header


- SMT- side entry

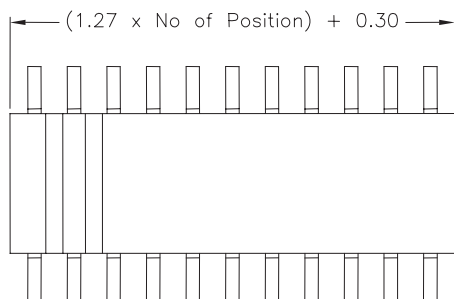

APPLICATION AND FEATURES

- **Standard: tube packing**
- Hi-rel dual beam contact assures reliable PC-Board connections
- Accepts 0.40mm square pins; Pin Header 1.27mm x1.27 mm
- 3.50mm height above board
- Automatic assembly to PCB possible

PCB Surface Mount Layout

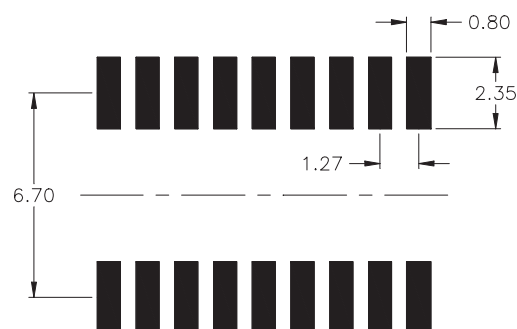

SPECIFICATIONS

Current rating	1 A
Insulator resistance	1000 MΩ min.
Contact resistance	20 mΩ max.
Withstanding voltage	500 V AC

Operating temperature	- 40°C to +105°C
Processing temperature	+250°C +0/-5°C for 10sec.
Contact material	(RoHS compliant) Phosphor Bronze
Insulator material	(RoHS compliant) Nylon 6T UL 94 V-0

How to order

BS 2 - xxx - R 345 - 55 / 11 X

Nbr of contacts
006 to 080

Plating
55 = gold
Other platings on request

Packing Option
R = reel packing