






Power Connection System

8861-06 Series Crimp Terminal Housings


- * Material : Nylon UL 94V-2
- * Current rating : 5A, AC/DC
- * Voltage rating : 250V AC/DC
- * Color : White
- * Accepts 8800T terminal
- * Mates with 8862 series headers
- * 6 circuits (with locking key)

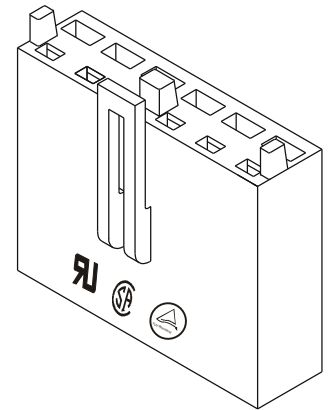


inch
mm

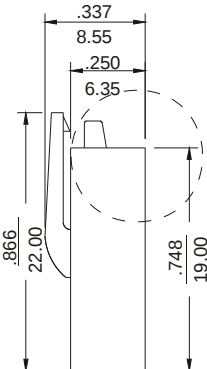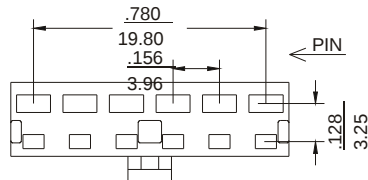

TYPE A.



TYPE B.



TYPE C.

PART/ NO	HOUSING					
	KEYING AT CIRCUIT POSITIONS					
	1	2	3	4	5	6
8861-06Z	Yes	No	Yes	Yes	No	No
8861-06ZH	Yes	Yes	Yes	Yes	Yes	Yes
8861-06Z1	Yes	No	No	No	No	No
8861-06Z2	No	Yes	No	No	No	No
8861-06Z3	No	No	Yes	No	No	No
8861-06Z4	No	No	No	Yes	No	No
8861-06Z5	No	No	No	No	Yes	No
8861-06Z6	No	No	No	No	No	Yes



E118260





LR82315




R9452636

8862I Series Straight Friction Lock Headers


- * Material : Nylon UL 94V-2
- * Current rating : 5A, AC/DC
- * Voltage rating : 250V, AC/DC
- * Contact : Tin-plated or gold-flash brass
- * Split pins
- * Color : White
- * Mates with 8861-06 series housings
- * 6 & 12 circuits available

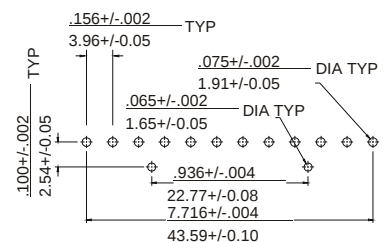


inch
mm

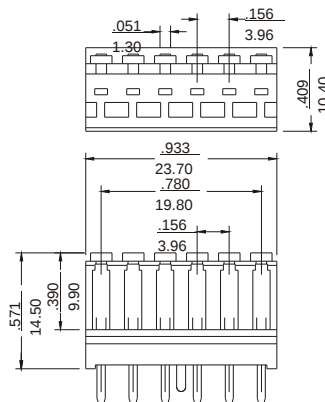

8862I-06

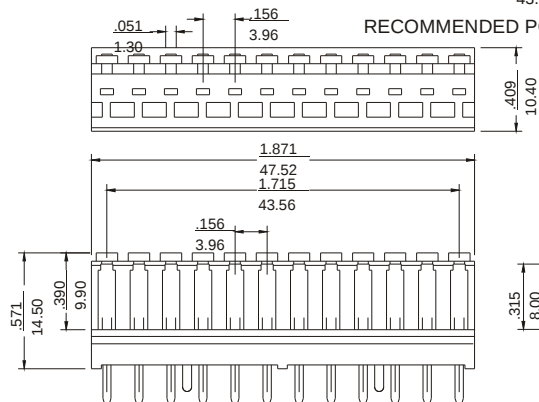

8862I-12



RECOMMENDED PCB LAYOUT



E118260



LR82315



R9452636