

Product Female socket, solder
Area M16 connectors IP 40


serie 581/ 680/ 682

Pole 7 DIN
Article number 09 1584 00 07


illustration



scale drawing

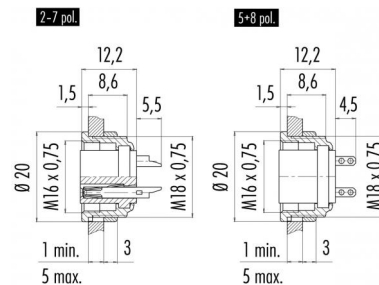

Contact Arrangement



	X	Y
1	-3,50	0,00
2	0,00	3,50
3	3,50	0,00
4	-2,47	2,47
5	2,47	2,47
6	-2,47	-2,47
7	2,47	-2,47

You can find the assembly instruction on the next page.

Technical data

Common values

Connector Design	Female socket
Connector locking system	Screw
Termination	solder
Wire gauge (mm)	0,75 mm ²
Wire gauge (AWG)	20
Upper temperature	+85 °C
Lower temperature	-40 °C

Material


Material of contact	CuSn (bronze)
Contact plating	Ag (silver)
Material of contact body	PBT (UL 94 V-0)
Material of housing	zinc diecasting, nickel plated

Cable data

Electrical values

Rated voltage	60 V
Rated impulse voltage	500
Pollution degree	I
Overvoltage category	I
Material group	III
Rated current (40 °C)	5 A
Volume resistivity	≤ 5 mΩ
EMV compliance	shielded
Degree of protection	IP 40
Mechanical operation	>500 mating cycles

Contacts 7 DIN, female socket, solder, 2 - 8
Contacts, silver plated contacts



Product	Female socket, solder	Pole	7 DIN
Area	M16 connectors IP 40	Article number	09 1584 00 07
	serie 581/ 680/ 682		

Installation instructions / Mounting cutout

