



Rear Shell



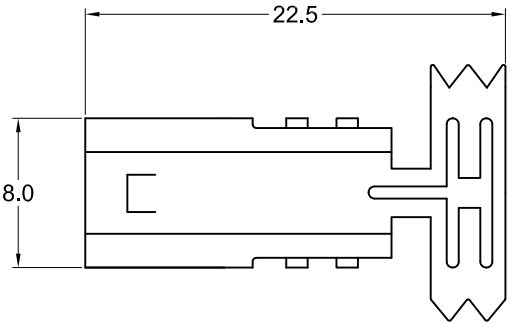


Materials and Finish



Shell:
Steel or Phosphor Bronze
0.30mm Thickness

Insulator:
PBT Thermoplastic
UL 94V-0 Rated,
White Color

Insulator Body

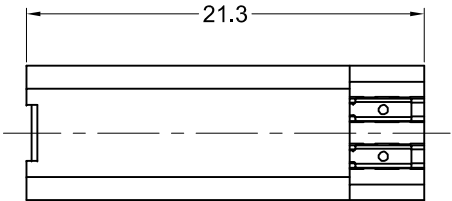


Front Shell

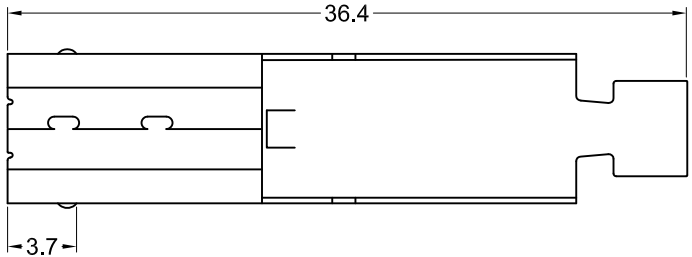


Tolerances

X.X ± 0.25
X.XX ± 0.15
Unless Stated
Otherwise


RoHS COMPLIANT
EU Directive 2002/95/EC

REV.	DATE	DESCRIPTION	REV. BY	CHK. BY	DRAWN BY	DATE	KUSBX-BP-KIT-SC	USB B-Type Plug Assembly, RoHS Compliant	
A1	6/27/05	New Drawing	N.Chang	C. Furumasu	N.Chang	6/27/05			
B1	03/11/10	ECO #10-016	S. Vien	H. MA					
B2	10/07/10	ECO #10-070	S. Vien	H. MA					
B3	10/16/12	ECO #12-061	S. Vien	P. DalCanto		UNITS	mm	With Solder Cup Ends, Page 1 of 2	
B4	01/16/13	ECO #12-063	S. Vien	P.DalCanto					
B5	05/08/14	Remove CSA	W. Cook	P.DalCanto					


Front Shell

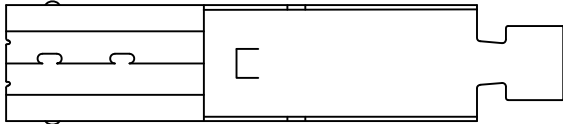

Insulator Body







Rear Shell



Materials and Finish

Shell:
Steel or Phosphor Bronze
0.30mm Thickness

Insulator:
PBT Thermoplastic
UL 94V-0 Rated,
White Color

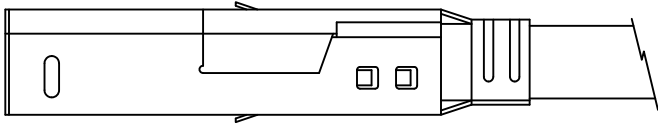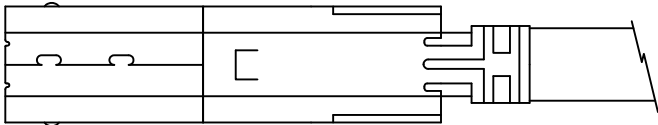

RoHS COMPLIANT
EU Directive 2002/95/EC

Tolerances
X.X ± 0.25
X.XX ± 0.15
Unless Stated
Otherwise

REV.	DATE	DESCRIPTION	REV. BY	CHK. BY	DRAWN BY	DATE	KUSBX-BP-KIT-SC	USB B-Type Plug Assembly, RoHS Compliant	
A1	6/27/05	New Drawing	N.Chang	C. Furumasu	N.Chang	6/27/05			
B1	03/11/10	ECO #10-016	S. Vien	H. MA					
B2	10/07/10	ECO #10-070	S. Vien	H. MA					
B3	10/16/12	ECO #12-061	S. Vien	P. DalCanto					
B4	01/16/13	ECO #12-063	S. Vien	P. DalCanto					
B5	05/08/14	Remove CSA	W. Cook	P. DalCanto					