

ROHS Compliant








台灣駿品端子股份有限公司

TAIWAN KING PIN TERMINAL CO.,LTD

台北縣樹林市俊德街 23 號



TEL:886-2-26895596.26886112 FAX:886-2-26886110

E-mail:info@tkp.com.tw http://www.tkp.com.tw

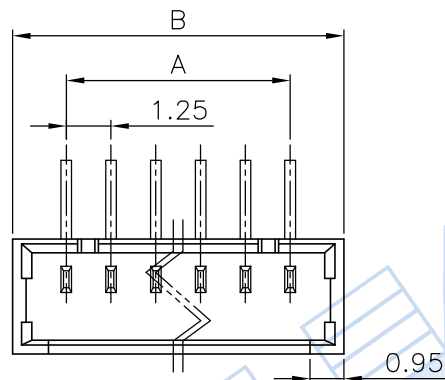

NOTE :

- * Material : Nylon UL 94V-0(Lead Free)
- * Standard color : Natural (Ivory)
- * Contact : Phosphor Bronze
- * Finish : Plated Tin over Gold Flash
Lead over Nickel
- * Electrical rating : UL 125V 1A, AC/DC
CSA 30V 1A, AC/DC
- * Mates with H125 series housings
- * 2-15 circuits available

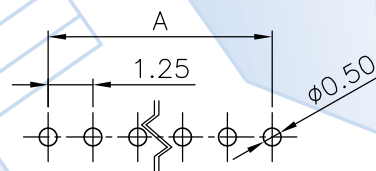

RECOMMENDED PCB LAYOUT



Part NO.	Contact	Finish
P125L-XX(LF)	Phosphor Bronze	Plated Tin/Lead over Nickel
P125L-XX-15u"	Phosphor Bronze	Gold Flash 15u" over Nickel
P125L-XX-20u"	Phosphor Bronze	Gold Flash 20u" over Nickel
P125L-XX-30u"	Phosphor Bronze	Gold Flash 30u" over Nickel

Circuits	Part No.	Dim.A	Dim.B	Circuits	Part No.	Dim.A	Dim.B
2	P125L-02(LF)	1.25	4.25	9	P125L-09(LF)	10.00	13.00
3	P125L-03(LF)	2.50	5.50	10	P125L-10(LF)	11.25	14.25
4	P125L-04(LF)	3.75	6.75	11	P125L-11(LF)	12.50	15.50
5	P125L-05(LF)	5.00	8.00	12	P125L-12(LF)	13.75	16.75
6	P125L-06(LF)	6.25	9.25	13	P125L-13(LF)	15.00	18.00
7	P125L-07(LF)	7.50	10.50	14	P125L-14(LF)	16.25	19.25
8	P125L-08(LF)	8.75	11.75	15	P125L-15(LF)	17.50	20.50

E118260 LR82315

PART NO.	P125L-XX(LF)	Part NO.	Material	Color/Finish	Remark	APPROVAL
TITLE	1.25mm Wire to Board	如上表				DRAWN: 高瑋瑩
THIRD ANGLE	SCALE 4:1 UNIT mm SHEET NO 1/1	TOLERANCE .XX±0.30 .XX±0.20	DATE 2011.10.05	ODD NUMBERS ENG950987	REV A3	CHECKED: 張明遠
	125-006 A125-003	ANGLE±2°				APPROVED: 陳泓宇