

ROHS Compliant



台灣駿品端子股份有限公司

TAIWAN KING PIN TERMINAL CO.,LTD

台北縣樹林市俊德街 23 號







TEL:886-2-26895596.26886112 FAX:886-2-26886110

E-mail:info@tkp.com.tw

http://www.tkp.com.tw

NOTE :

- * Material : Nylon UL 94V-0
- * Standard color : Natural (Ivory) or White
- * Contact : Phosphor bronze
- * Finish : Plated Tin/Lead over Nickel
- * Electrical rating : UL 125V 1A, AC/DC
CSA 30V 1A, AC/DC
- * Mates with H125 series housings
- * 2-15 circuits available
- * S Type hook

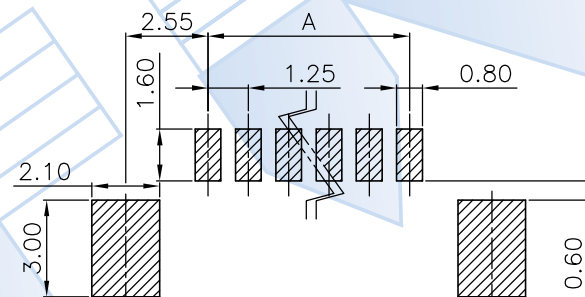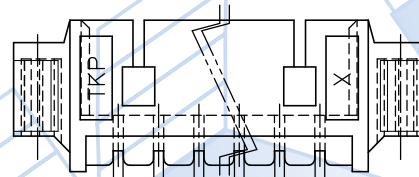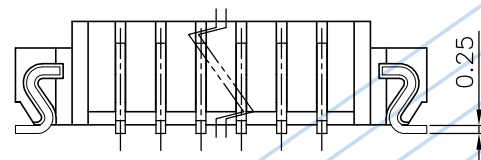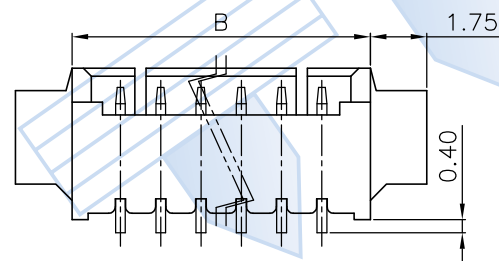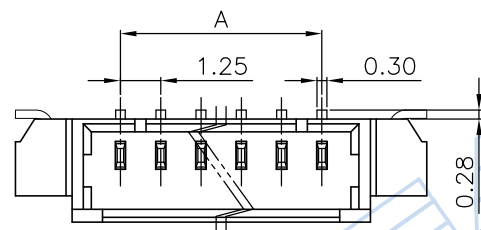

RECOMMENDED PCB LAYOUT

E118260 LR82315

PART NO.	P125L-XXSMT-01(LF)	Part NO.	Material	Color/Finish	Remark	APPROVAL
TITLE	1.25mm Wire to Board	P125L-XXSMT-01(LF)	UL 94V-0	Natural (Ivory)		DRAWN: 高瑋瑩
THIRD ANGLE	SCALE	UNIT	SHEET NO	TOLERANCE	DATE	ODD NUMBERS
	4:1	mm	1/1	.X± 0.30 .XXX±0.10 .XX± 0.20	2011.10.05	ENG950988
	125-010		A125-004	ANGLE±2°		REV A3
						APPROVED: 張明遠
						APPROVED: 陳泓宇



Circuits	Part No.	Dim. A	Dim. B	Circuits	Part No.	Dim. A	Dim. B
2	P125L-02SMT-01(LF)	1.25	4.25	9	P125L-09SMT-01(LF)	10.00	13.00
3	P125L-03SMT-01(LF)	2.50	5.50	10	P125L-10SMT-01(LF)	11.25	14.25
4	P125L-04SMT-01(LF)	3.75	6.75	11	P125L-11SMT-01(LF)	12.50	15.50
5	P125L-05SMT-01(LF)	5.00	8.00	12	P125L-12SMT-01(LF)	13.75	16.75
6	P125L-06SMT-01(LF)	6.25	9.25	13	P125L-13SMT-01(LF)	15.00	18.00
7	P125L-07SMT-01(LF)	7.50	10.50	14	P125L-14SMT-01(LF)	16.25	19.25
8	P125L-08SMT-01(LF)	8.75	11.75	15	P125L-15SMT-01(LF)	17.50	20.50