

Series 780


SPECIFICATIONS

技術資料

Socket Strip

Pitch 2.54mm, Height 8.5mm, Straight & Right
(Single & Double Row)

780-152-20

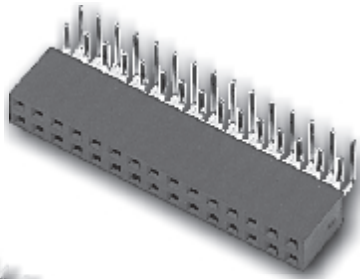

780-152-20



MATERIAL

- **Contact:** Phosphor Bronze
- **Plating:** Gold Flash
- **Insulator body:** (Black) Glass Filled Polyester (UL 94 V-0)

ELECTRICAL



- **Current Rating:** 3Amp. / contact max.
- **Contact Resistance:** $\leq 20\text{m}\Omega$ / contact
- **Insulation Resistance:** $\geq 100\text{m}\Omega$
- **Operating Voltage:** 60V
- **Dielectric Withstanding Voltage:** AC 1000V Per minute

MECHANICAL

- **Average Insertion Force:** 0.8N
- **Average withdrawal Force:** 0.8N
- **Mechanical Life Cycle:** Min. 100
- **Operating temperature:** -40°C to $+105^{\circ}\text{C}$ / -40°F to $+221^{\circ}\text{F}$
- **Soldering Temperature:** $+260^{\circ}\text{C}$, 10sec. / $+500^{\circ}\text{F}$, 10sec.

STRAIGHT PIN, SINGLE ROW



Pin Style 10

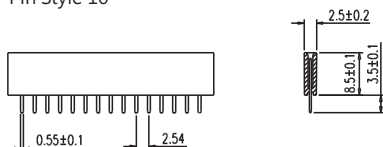

Straight Pin, Single Row

RIGHT ANGLE, SINGLE ROW



Pin Style 20

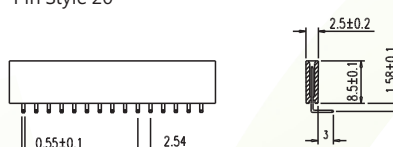

Right Angle, Single Row

STRAIGHT PIN, DOUBLE ROW



Pin Style 10

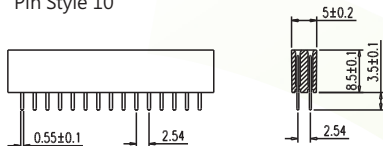

Straight Pin, Double Row

RIGHT ANGLE, DOUBLE ROW

Pin Style 20

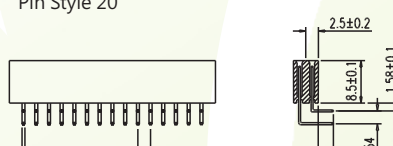

Right Angle, Double Row

HOW TO ORDER 排序整理

7 8 0 - X X X - X 0

Series No.
系列編號

No. of Pin
針腳數目

No. of Row
1 Single
2 Double

Pin Style
1 Straight Pin
2 Right Angle