





Pin header					Technical data:	
					Insulating material:	Nylon 66, UL 94V-0
					Contact material:	Brass
					Plating:	Tin
					Rated current:	5 Amp.
					Rated voltage:	250 V _{RMS} /V _{DC}
					Withstand voltage:	1500 V _{AC} for one minute
					Operating temperature:	-25°C to +85°C
pitch	rows	row distance	orientation	termination		
3,96	1		right angled	through hole		

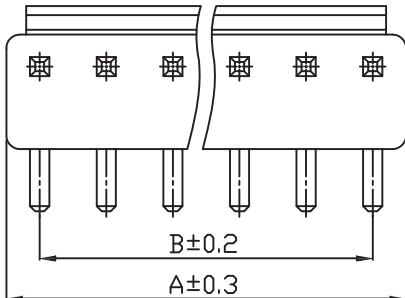

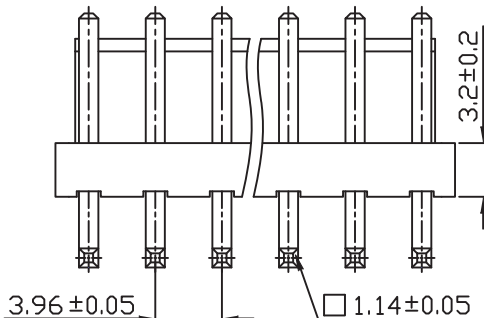



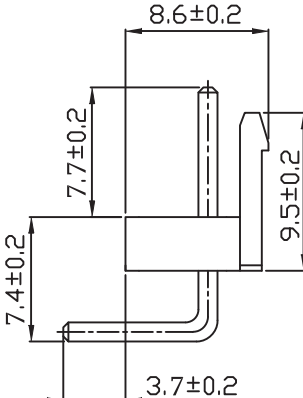

Pincount	Dimensions	
	A	B
002	7.92	3.96
003	11.88	7.92
004	15.84	11.88
005	19.80	15.84
006	23.76	19.80
007	27.72	23.76
008	31.68	27.72
009	35.64	31.68
010	39.60	35.64
011	43.56	39.60
012	47.52	43.56
013	51.48	47.52
014	55.44	51.48
015	59.40	55.44

Pincount: see table

Plating: T = Sn

Order code:580-2-XXX-0-T-BS0