

USB 2.0 Sockets Type B

PCB, vertical

SPECIFICATION:

Current rating:	1,5 A
Voltage rating:	30 V
Insulation resistance:	1000 MΩ min.
Contact resistance:	30 mΩ max.
Dielectric voltage:	500 V AC
Operation temperature:	-55 °C to +85 °C

MECHANICAL:

Mating force:	≤ 35 N
Unmating force:	≥ 10 N

MATERIAL:

Insulator:	PBT white UL94V-0
Shell:	Copper alloy
Contacts:	Copper alloy

FINISH:

Shell:	Nickel plated
Contacts:	Gold Flash in contact area Tin plated on solder tails





HANDLING:

Processing:	Wave soldering
Packing:	Tray


TOLERANCE:

.X	± 0.30
.XX	± 0.25

RoHS
COMPLIANT

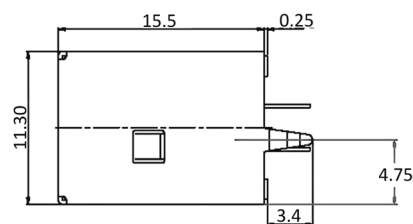

Section A-A



Order-Information

Identifier:

UBU1BG

Socket Type B vertical