

Product Ribbon cable terminal, ready to assemble, M12 cable outlet, can be assembled, lower section with fixing strap

Pole

Area AS interface


serie 775

Article number 99 6430 00 02

illustration



scale drawing

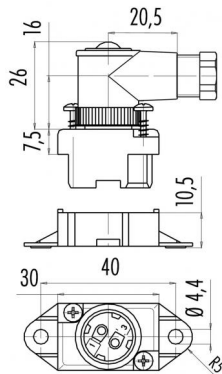

You can find the item description on the next page.

Technical data

Common values

Connector Design	Ribbon cable terminal
Connector locking system	Ribbon cable terminal
Termination	Piercing technology, screwing
Wire gauge (mm)	1.5 mm ² , 0.75 mm ²
Wire gauge (AWG)	16, 28
Cable outlet	4 - 6 mm
Upper temperature	+70 °C
Lower temperature	-25 °C

Electrical values

Rated voltage	30 V
Pollution degree	3
Rated current (40 °C)	2 A (per contact)
Volume resistivity	≤ 8 mΩ
Degree of protection	IP67
Mechanical operation	Max. 10 mating cycles


Material

Material of contact	CuZn (Brass)
Contact plating	Sn (Tin)
Material of contact body	PA
Material of housing	PA

Cable data


insulation single lead	-
single lead structure	-
bending radius cable fixed	-
bending radius cable movable	-

cable outlet: 4 - 6 mm, Contacts: 2, Ribbon cable terminal, ready to assemble, M12 cable outlet, can be assembled, lower section with fixing strap



Product	Ribbon cable terminal, ready to assemble, M12 cable outlet, can be assembled, lower section	Pole
Area	AS interface	Article number 99 6430 00 02
	serie 775	

Item description

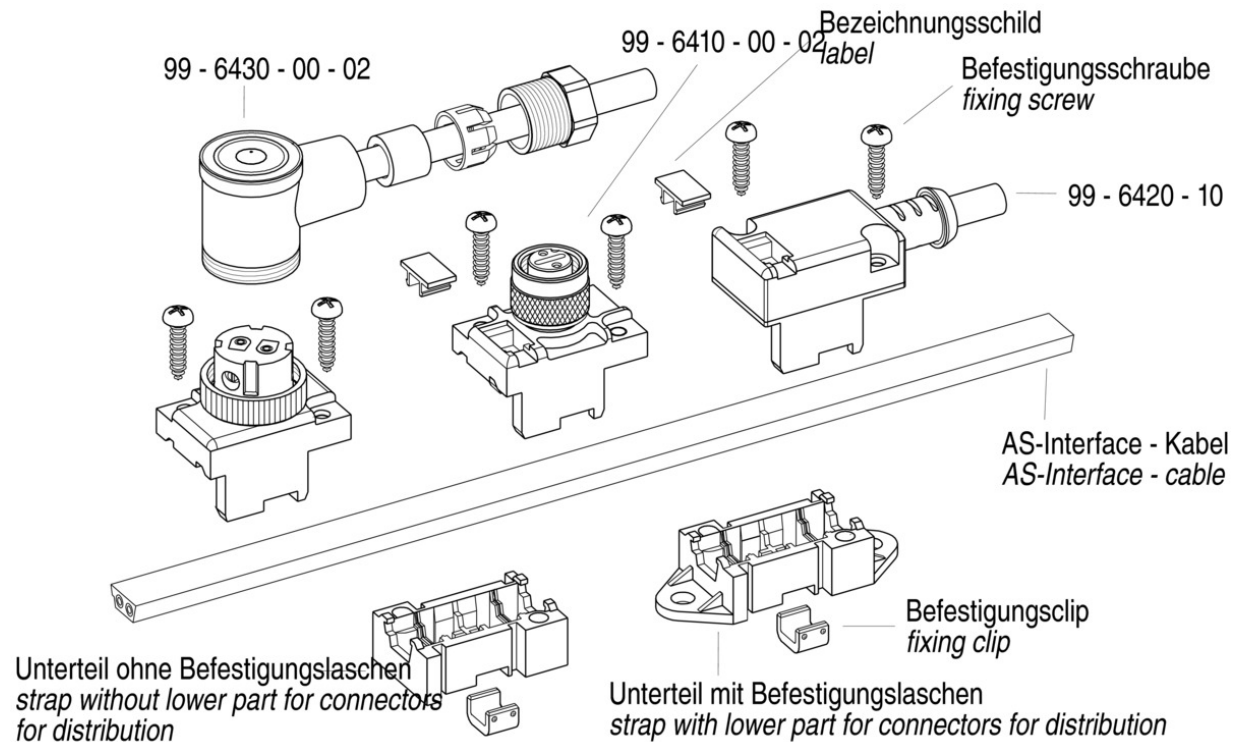

Item description

