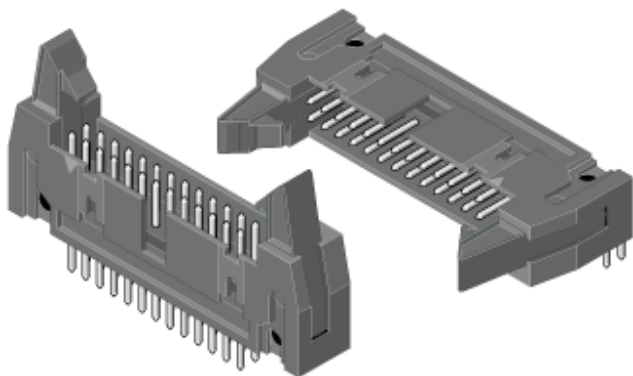


Order code: 092-2-010-0-F-BS0


3) PIN HEADER

Series: **092**


Pitch (mm)	2,54
Mating contact size	sq. 0,64
No of contacts	10
Polarising	Yes
Locking	Positive lock
Material contact	Copper alloy
Plating contact	Au
Material insulator	Thermoplast UL94V-0
Rated current	3,0 A
Rated voltage	150 V _{RMS} / V _{DC}
Withstand voltage	500 V _{RMS} for 1 minute
Operating temperature	-40°C to +105°C
Max. processing temper.	260°C for 10 seconds
Packaging	Standard
A	31,90
B	10,16
C	21,70

Shrouded pin headers according DIN 41651 / IEC60603-13 in vertical or horizontal version. Part comes with pre-mounted locking feature in 2 optional lengths.

Through hole, straight with long latch

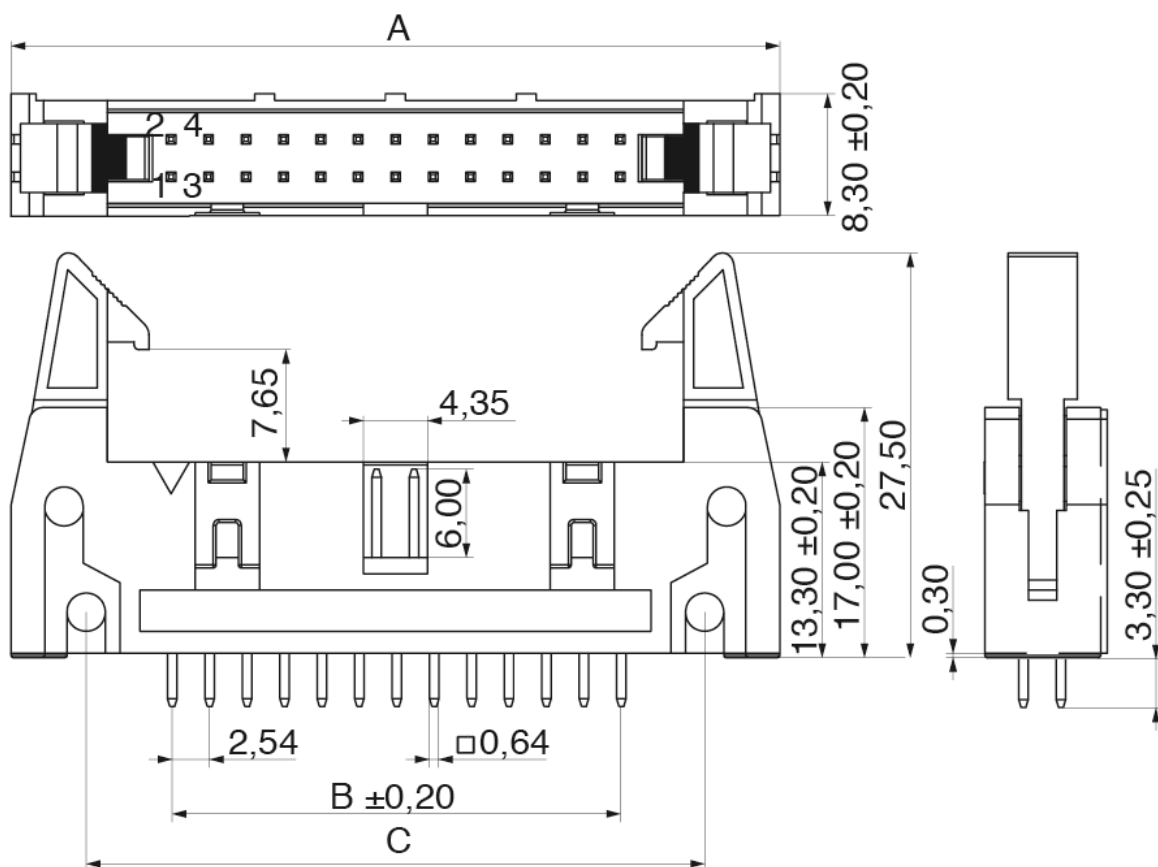

Footprint:

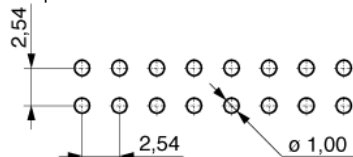**Order code: 092-2-010-0-F-BS0**

MPE Garry GmbH
Schäfflerstraße 13
87629 Füssen/Germany

Phone: +49 (0) 83 62 / 91 56-0
Fax: +49 (0) 83 62 / 91 56-500
Email: yk@mpe-connector.de

Date: 11.06.2015 Internet: http://www.mpe-connector.de/index.php?lang=en&menu=4&s_product=092-2-010-0-F-BS0