

**Compact splicing connector; 3-conductor terminal block; with operating levers; max. continuous service temperature 85°C**

Item No.: 222-413



Compact splicing connector; 3-conductor terminal block; with operating levers; max. continuous service temperature 85°C

### Marking

RoHS ✓  
Compliant

### Business data

Supplier	WAGO
Item no.	222-413
GTIN / EAN	4017332955676
Content	1
Order amount	50
Customer item number	

### Notes

### Technical data

#### Miscellaneous

Total number of connection points	3
Total number of potentials	1
Color	gray
Pollution degree (1)	2
Rated voltage EN (1) [V]	400 [V]
Rated surge voltage (1) [kV]	4 [kV]
Nominal current [A]	32 [A]
Connection technology (1)	CAGE CLAMP®

Printview: Compact splicing connector; 3-conductor terminal block; with operating levers; max. continuous service temperature 85°C - Item No.: 222-413

Technical data	
<i>Solid sizes 1</i>	<i>0.08 ... 2.5 mm<sup>2</sup> / 28 ... 12 AWG</i>
<i>stranded, connectable 1</i>	<i>0.08 ... 2.5 mm<sup>2</sup> / 28 ... 12 AWG</i>
<i>Fine-stranded wires 1</i>	<i>0.08 ... 4 mm<sup>2</sup> / 28 ... 12 AWG</i>
<i>Strip length 1</i>	<i>9 ... 10 mm / 0.35 ... 0.39 in</i>
<i>Type of wiring</i>	<i>Side-entry wiring</i>
<i>Fire load [MJ]</i>	<i>0.088 [MJ]</i>
<i>Weight [g]</i>	<i>4.283 [g]</i>
<i>Width</i>	<i>17 mm / 0.669 in</i>
<i>Height</i>	<i>14.5 mm / 0.571 in</i>
<i>Length</i>	<i>20.5 mm / 0.807 in</i>
<i>Safety information 1</i>	<i>In grounded power lines</i>

Approbation					
Item No.	Registration	Registration no.	Voltage [V]	Current [A]	Cross section [mm <sup>2</sup> , AWG]
222-413	ABS	10-HN17750340X	450	32	0,5-4
222-413	ENEC15	DK140137-01	450	32	0,5-4


## Accessories

Strain relief		
Item no.	Description	Pack. unit (Sub Pack)
222-505	Strain relief plate; for snap-on fixing to 222-500 mounting carrier	10

General accessory		
Item no.	Description	Pack. unit (Sub Pack)
222-500	Mounting carrier; for 2-, 3-, 5-wire compact splicing connectors	10
222-510	Angled DIN-rail adapter; in combination with 222-500 mounting carrier for DIN 35 rail mounting	10

Images & drawings



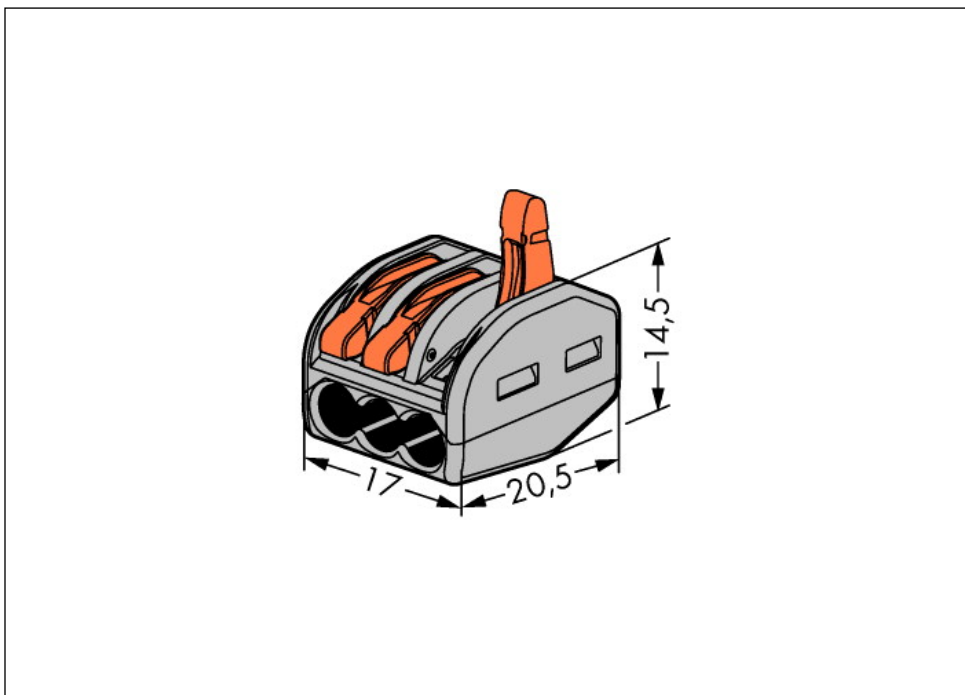

**Address**

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27

32423 Minden

Telefon: 0571/887-0

Fax: 0571/887-169

<http://www.wago.com>

© WAGO Kontakttechnik GmbH & Co. KG

Technische Änderungen und Irrtümer vorbehalten.