



Catamount®

Wire Protection Products

SPIRAL WRAP

- For Protection of Bundles from .063" to 7"
- Install Gapped for Greater Flexibility or Butted for Maximum Abrasion Resistance, Insulation and Rigidity
- Stocked in 3 Materials Including Polyethylenes and Nylon
- a.k.a.: Reverse Cut, Left-Hand Cut, Counter Clockwise Cut
- Use Cutting Tool SR-100

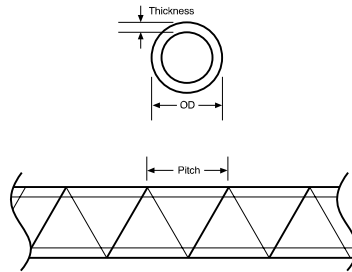

Item Number	Material	Outside Diameter		Pitch		Nominal Wall Thickness		Min./Max. Bundle Range		UL Flammability
		Inch	(mm)	Inch	(mm)	Inch	(mm)	Inch	(mm)	
SRPE-187-9-C	Natural Polyethylene	.187	(4.8)	.240	(6.1)	.040	(1.0)	.125	(3.2) to 1.500 (25.9)	94 HB
SRPE-250-9-C		.250	(6.4)	.375	(9.5)	.045	(1.1)	.188	(4.8) to 2.000 (50.8)	
SRPE-375-9-C		.375	(9.5)	.438	(11.1)	.052	(1.3)	.313	(7.9) to 3.000 (76.2)	
SRPE-500-9-C		.500	(12.7)	.563	(14.3)	.062	(1.6)	.375	(9.5) to 4.000 (102.0)	
SRPE-625-9-C		.625	(15.9)	.625	(15.9)			.625	(15.9) to 4.500 (114.3)	
SRPE-750-9-C		.750	(19.1)	.750	(19.1)	.065	(1.7)	.750	(19.1) to 5.000 (127.0)	
SRPE-1000-9-C	1.000	(25.4)	1.110	(28.2)	.070	(1.8)	1.000	(25.4) to 7.000 (177.8)		
SRPE-187-0-C	UV Black Polyethylene	.187	(4.8)	.240	(6.1)	.040	(1.0)	.125	(3.2) to 1.500 (25.9)	
SRPE-250-0-C		.250	(6.4)	.375	(9.5)	.045	(1.1)	.188	(4.8) to 2.000 (50.8)	
SRPE-375-0-C		.375	(9.5)	.438	(11.1)	.052	(1.3)	.313	(7.9) to 3.000 (76.2)	
SRPE-500-0-C		.500	(12.7)	.563	(14.3)	.062	(1.6)	.375	(9.5) to 4.000 (102.0)	
SRPE-625-0-C		.625	(15.9)	.625	(15.9)			.625	(15.9) to 4.500 (114.3)	
SRPE-750-0-C		.750	(19.1)	.750	(19.1)	.065	(1.7)	.750	(19.1) to 5.000 (127.0)	
SRPE-1000-0-C	1.000	(25.4)	1.110	(28.2)	.070	(1.8)	1.000	(25.4) to 7.000 (177.8)		
SRNY-250-9-C	Natural Nylon	.250	(6.4)	.375	(9.5)	.025	(.6)	.187	(4.8) to 2.000 (50.8)	94 V-2
SRNY-375-9-C		.375	(9.5)	.438	(11.1)	.035	(.9)	.312	(7.9) to 3.000 (76.2)	
SRNY-500-9-C		.500	(12.7)	.563	(14.3)			.375	(9.5) to 4.000 (102.0)	
Tolerance ±		.030 (.762)		.010 (.254)						

- Stocked in 100 foot rolls


SR-100 CUTTING TOOL

Use our SR-100 Cutting Tool for all your Plastic Pipe and PVC Conduit needs to 1 1/4" I.D.

Features:

- High-carbon, Teflon®-coated replaceable steel blade
- Contoured handle resists tube crushing
- Produces no "sawdust", no need to deburr
- Lightweight, low-profile and no exposed blade when stored

Teflon® is a trademark of the DuPont Corporation



Item Number	Description
SR-100	Cutting Tool
SR-R	Replacement Blade