




3-polig	4-polig	5-polig	5-polig	5-polig	6-polig	7-polig	8-polig	8-polig	13-polig	14-polig
180°	210°	180°	240°	360°	240°	270°	270°	262°		

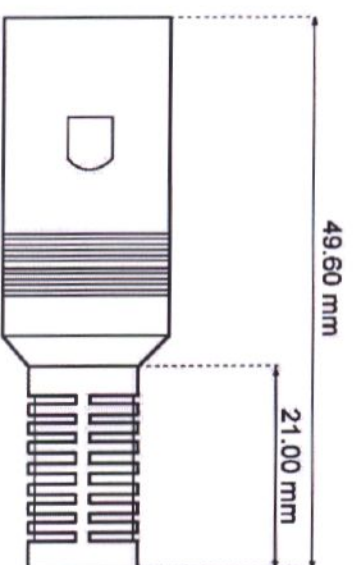

- DIN-Kupplung 8-polig 262°
- Kunststoff schwarz mit Knickschutz
- RoHS konform
- DIN-Jack 8-poles 262°
- plastic housing black
- RoHS compliant

Änderungen

Datum Name

Datum Name

Bezeichnung

Blatt

gez.:

gepr.:

Norm.:

Norm.:

Zeichnungs-Nr.:

von