



<b>Type</b>	: Rechargeable Nickel Metal Hydride Cylindrical Cell
<b>Nominal Dimension (with Sleeve)</b>	: $\Phi = 10.5\text{mm}$ H = 44.5mm
<b>Applications</b>	: Recommended discharge current 93 to 2790 mA
<b>Nominal Voltage</b>	: 1.2V
<b>Capacity</b>	: Nominal: 930mAh Minimum: 930mAh Typical: 970mAh When discharged at 186mA to 1.0V at 20°C
<b>Charging Condition</b>	: 93mA for 16 hrs at 20°C
<b>Fast Charge</b>	: 465mA to 930mA (0.5 to 1C) charge termination control recommended control parameters: - $\Delta V$ : 0-5mV **DT/dt : 0.8°C/min (0.5 to 0.9C) 0.8 - 1°C/min (1C) **TCO : 45 - 50°C **Timer : 105% nominal input **for ref. only
<b>Service Life</b>	: >500 cycles (IEC standard)
<b>Continuous Overcharge</b>	: 93mA maximum current for 1 year. No conspicuous deformation and/or leakage
<b>Weight</b>	: 15.2g
<b>Internal Resistance</b>	: Average 40m $\Omega$ upon fully charged (Range 24 - 55m $\Omega$ ) at 1000Hz
<b>Max. Charging Voltage</b>	: 1.5V at 93mA charging
<b>Ambient Temperature Range</b>	: Standard Charge : 0 to 45°C Fast Charging : 10 to 45°C Discharge : -20 to 50°C Storage : -20 to 35°C


Model No.: **GP100AAAHC**

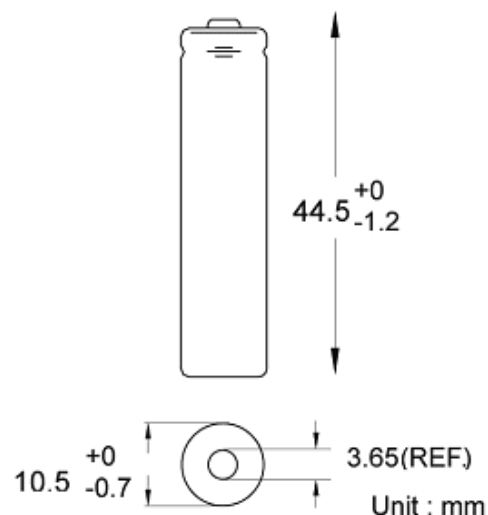


### Low Rate Discharge

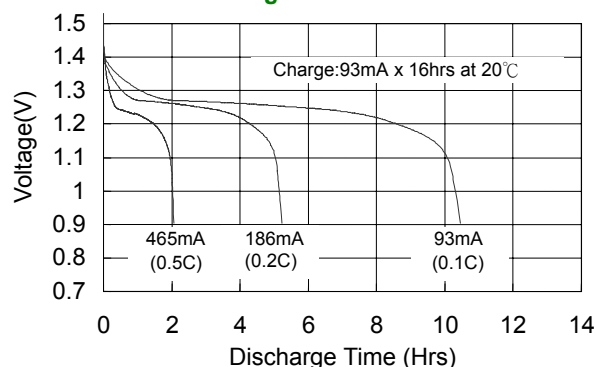

### Fast Charge (Charge Control Required)

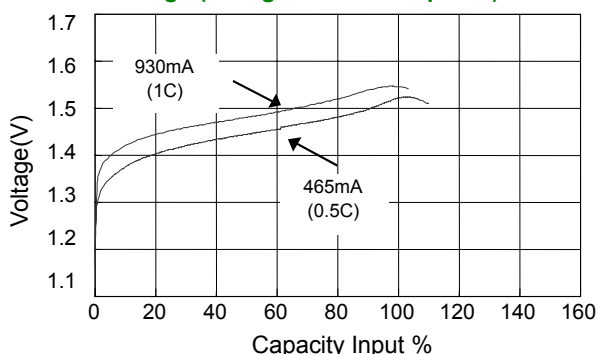

### High Rate Discharge

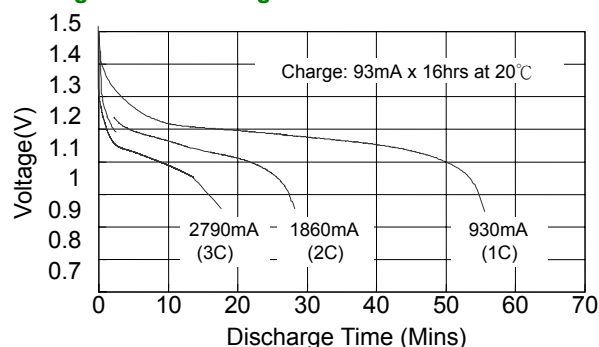

**CELL PACK**  
SOLUTIONS

Telephone: +44 (0)191 496 9999

Email: batteries@cellpacksolutions.co.uk

Website: www.cellpacksolutions.co.uk

The information (subject to change without prior notice) contained in this document is for reference only and should not be used as a basis for product guarantee or warranty. For applications other than those described here, please consult your nearest GP Sales and Marketing Office or Distributors.

TRS0431 Rev.01