



## Battery Handling and Precautions

### Soldering

- Do not solder directly onto batteries. Always solder onto solder tag for connection.
- GP NiMH rechargeable button cells with tags can be flow-soldered in a charged state within 10 seconds.

### Charging and Discharging

- Always charge batteries before first time application even though some of our batteries are delivered in a charged state.
- Parallel charging or connection is not recommended. Parallel charging will produce irregular charging currents. Please consult GP Batteries for more details.
- Never short-circuit or reverse polarity in application.
- Do not use different types of batteries in the same battery assembly.
- If the battery has been deep-discharged, a prolonged charging time is required to bring the battery back to full capacity.

### Storage

- Always store batteries in a cool, dry place.
- After long storage, e.g. over a year, it is desirable to cycle (charge/discharge) the battery 3 times to restore full capacity.
- Do not mix batteries with metal objects during storage or transportation to avoid accidental short-circuit.
- Do not store large quantities of batteries in a densely packed condition when they are in a charged or partially charged state.

### Battery Handling

- Do not incinerate or dismantle batteries. Cell components are corrosive and may be harmful to skin and eyes.
- Do not pull on battery lead wires or connector. Excessive force on the leads or connectors can damage the welding joints or other connections.

### Easy Battery Removal

- Some countries have legislation requiring easy removal of batteries from the devices. When designing a product, consideration should be given to the use of a socket connector and an easy-to-open battery compartment.

Distributed by:

# GP Batteries

## WORLDWIDE HEADQUARTERS HONG KONG

### GPI INTERNATIONAL LIMITED

Gold Peak Building, 8/F, 30 Kwai Wing Road,  
Kwai Chung, N.T., Hong Kong  
Tel: (852) 2484 3333 Fax: (852) 2480 5912  
E-mail address: gpil@goldpeak.com  
Website: <http://www.gpbatteries.com.hk>

## SALES & MARKETING BRANCH OFFICES

### ASEAN

GP BATTERY MARKETING (SINGAPORE) PTE. LIMITED  
97 Pioneer Road, Singapore 639579  
Tel: (65) 6559 9760 Fax: (65) 6559 9761

### MALAYSIA

GP BATTERY MARKETING (MALAYSIA) SDN. BHD.  
Lot 8, Jalan Pemberita U1/49,  
Temasya Industrial Park,  
40150 Shah Alam, Selangor Darul Ehsan, Malaysia  
Tel: (60) 3 5569 3499 Fax: (60) 3 5569 3498

### THAILAND

GP BATTERY MARKETING (THAILAND) CO., LTD.  
102 Soi Sukhumvit 26, Sukhumvit Road,  
Klongton, Klongtoey,  
Bangkok 10110 Thailand  
Tel: (66) 2 661 3688 Fax: (66) 2 661 3602

### TAIWAN

GOLD PEAK INDUSTRIES (TAIWAN) LIMITED - TAIPEI OFFICE  
Room 1200, International Trade Building, No.205 Sec.1,  
Tun Hua South Road, Taipei 10647, Taiwan R.O.C.  
Tel: (886) 2 2741 4919 Fax: (886) 2 2731 4868/2741 0192

### CHINA

HUIZHOU CHAO BA BATTERY TECHNOLOGY CO., LTD  
2/F, South of Hongye Industrial Building,  
Tianluo Mountain, 14th Industrial District,  
Huizhou City, Guangdong, China  
(Postal Code: 516003)  
Tel: (86) 752 282 8428 Fax: (86) 752 280 2872

### HONG KONG

GP BATTERY MARKETING (H.K.) LIMITED  
Gold Peak Building, 8/F, 30 Kwai Wing Road,  
Kwai Chung, N.T., Hong Kong  
Tel: (852) 2420 0281 Fax: (852) 2494 9349

### KOREA

GP BATTERY MARKETING (KOREA) LIMITED  
Kunsul Hoekwan Building, 9/F, 71-2 Non Hyun-Dong,  
Kang Nam-Gu, Seoul, South Korea  
Tel: (82) 2 549 7188/9, 2 516 3936/7  
Fax: (82) 2 514 0623, 2 516 0621

### U.S.A.

GOLD PEAK INDUSTRIES (NORTH AMERICA) INC.  
11235 West Bernardo Court, San Diego,  
CA 92127-1638, U.S.A.  
Tel: (1) 858 674 6099 Fax: (1) 858 674 6496

### CANADA

GP BATTERY MARKETING INC.  
Unit 7, 7780 Woodbine Avenue, Markham,  
Ontario, Canada L3R 2N7  
Tel: (1) 905 474 9507 Fax: (1) 905 474 9452

### LATIN AMERICA

GP BATTERY MARKETING (LATIN AMERICA) INC.  
8370 NW, 68th Street, Miami, Florida 33166, U.S.A.  
Tel: (1) 305 471 7717 Fax: (1) 305 471 7718

### EUROPE

GP BATTERIES EUROPE B.V.  
Kortjzer 4, 5721 VE Asten,  
The Netherlands  
Tel: (31) 493 681030 Fax: (31) 493 681039

### GERMANY

GP BATTERY MARKETING (GERMANY) GMBH  
Niederlöricker Str. 62, 40667 Meerbusch, Germany  
Tel: (49) 2132 971504/5/6 Fax: (49) 2132 80145

### POLAND

GP BATTERY (POLAND) SP. Z.O.O.  
ul. Slowicza 19, PL-02170 Warsaw, Poland  
Tel: (48) 22 868 0490 Fax: (48) 22 846 7535

### U.K.

GP BATTERIES (U.K.) LIMITED  
Summerfield Avenue, Chelston Business Park,  
Wellington, Somerset, TA21 9JF, U.K.  
Tel: (44) 1 823 660 044 Fax: (44) 1 823 665 595

### ITALY

GP BATTERY MARKETING ITALY S.R.L.  
Via. Alessandro Volta 3,  
20094 Assago (MI), Italy  
Tel: (39) 02 488 2512 Fax: (39) 02 488 2865

### SCANDINAVIA

GPBM NORDIC AB  
Grimboasen 5, SE-417 49, Goteborg, Sweden  
Tel: (46) 31 558 600 Fax: (46) 31 556 813

# GP Batteries

## NiMH Rechargeable Button Cells





# NiMH Rechargeable Button Cells

## Specifications

Model No.	Nominal Capacity at 5-hr rate (mAh)	Nominal Dimension (mm)		Weight (g)	Standard Charge			Nominal Voltage (V)	End Voltage (V)
		Diameter	Height		Current (mA)	Time (hour)	Maximum Charging Voltage (V)		
<b>High Capacity Series</b>									
GP15BNH <sup>2**</sup>	15	9.5	2.6	0.7	1.5	16	1.5	1.2	1
GP20BNH <sup>2**</sup>	20	11.5	2.25	1.0	2	16	1.5	1.2	1
GP25BNH <sup>2</sup>	25	11.6	3.5	1.4	2.5	16	1.5	1.2	1
GP40BVH <sup>2**</sup>	40	11.6	5.5	1.9	4	16	1.5	1.2	1
GP80BVH <sup>1**</sup>	80	15.5	6.3	3.7	8	16	1.5	1.2	1
GP150BVH <sup>1</sup>	120	15.5	7.8	4.8	12	16	1.5	1.2	1
GP250BVH <sup>2</sup>	250	25	6.4	10.9	25	16	1.5	1.2	1
GP320BVH <sup>1</sup>	320	25	8.7	14.1	32	16	1.5	1.2	1

## Standard Series






GP60BVH <sup>1</sup>	60	15.5	6.3	3.6	6	16	1.5	1.2	1
GP170BVH <sup>1</sup>	170	25	6.4	9.8	17	16	1.5	1.2	1
GP280BVH <sup>1</sup>	280	25	8.7	12.6	28	16	1.5	1.2	1

Typical Ambient Temperature : <sup>1</sup> Standard Charge / Discharge : 0°C to 45°C / Storage : -20°C to 45°C

<sup>2</sup> Standard Charge : 0°C to 65°C / Discharge : -20°C to 65°C / Storage : -40°C to 65°C


\*\* With UL approval.

## Performance Characteristics

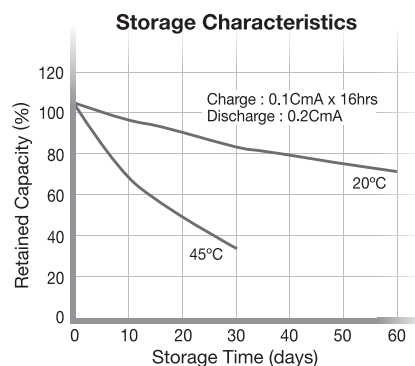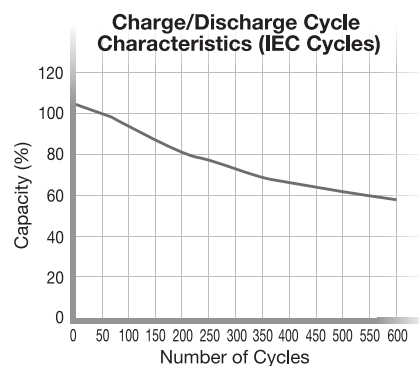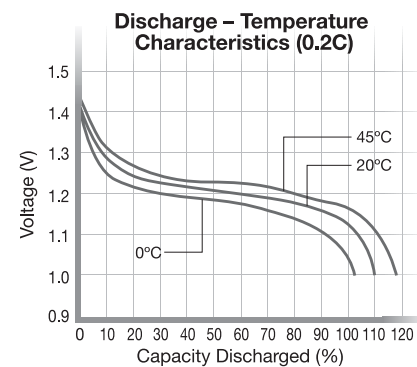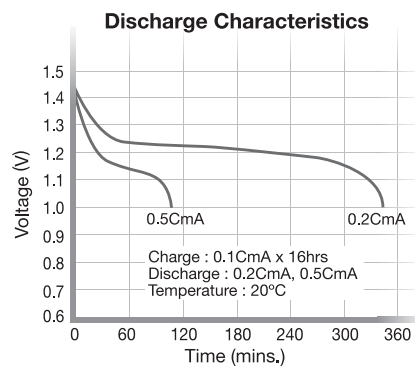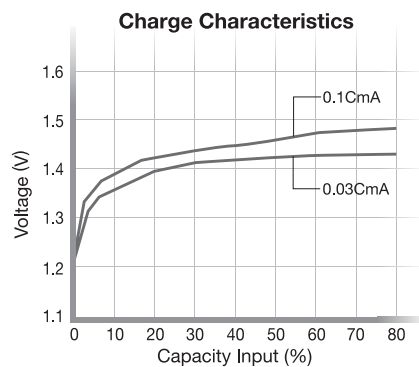

## Configurations


### Designation System for Battery Packs

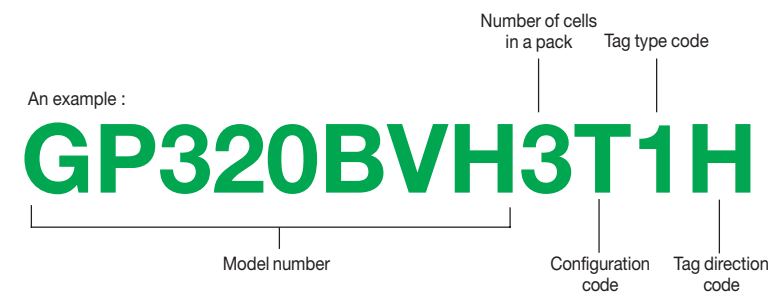


For battery packs with connectors, the **last two characters** will be used to specify connector type eg. GP320BVH3TMU.




### Standard Configurations for Battery Packs

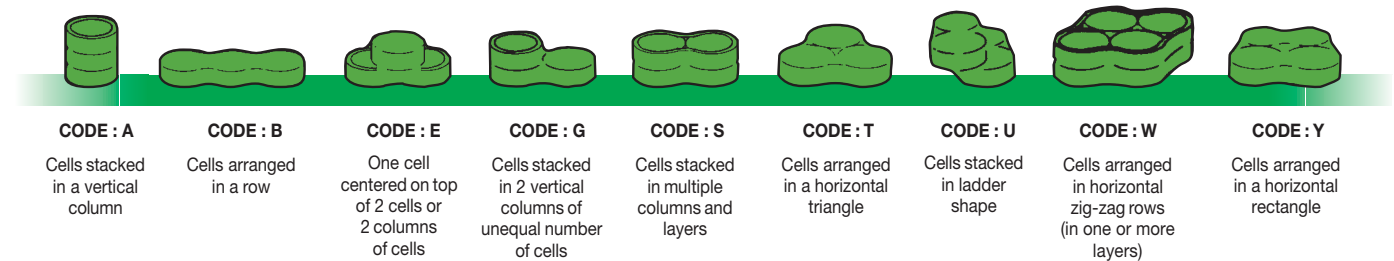

### Tag Type Specifications

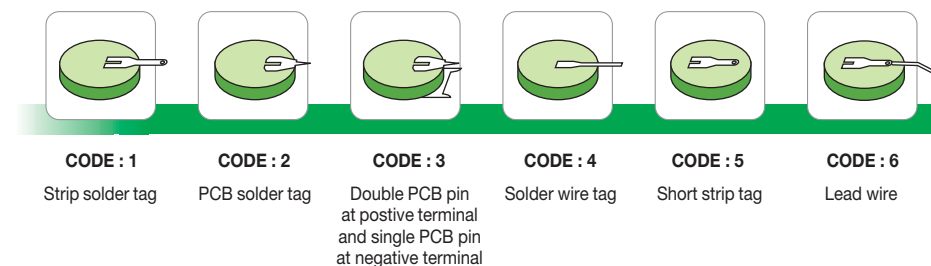

### Tag Direction Codes




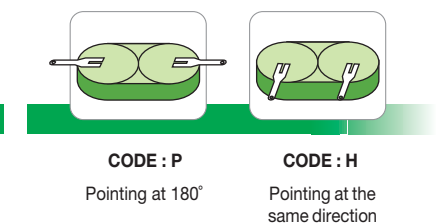


### Connector Type Specifications

**GP Universal Plug** - exclusively from GP, offers distinctive features unparalleled in the market.  
- U.S. patent no. 5,161,990.

#### Major Benefits

- Compatible with most cordless phone models (interchangeable with Mitsumi, JST, Molex plugs etc.)
- Minimise inventory items
- User friendly



# NiMH Rechargeable Button Cells

## Memory Backup Applications

GP Batteries provide consistent and reliable performance for memory backup (MBU) and real time clock (RTC) application, Built-in PCB tags facilitate the subsequent processing and wave soldering.


## Specifications

GP Model No.	No. of cells	Nominal Voltage (V)	Typical Capacity (mAh)	Nominal Capacity (mAh)	Length (mm)	Width (mm)	Height without pins (mm)	Tag Length (mm)	Weight (g)
<b>MBU Series</b>									
GP15BNH3A2H	3	3.6	16	15	9.8	10.3	10.3	4.5	2.3
GP20BNH3B2H	3	3.6	21	20	35.75	12.8	4.0	3.0	3.0
GP40BVH2A2H	2	2.4	48	40	11.7	12.5	12.5	4.5	4.2
GP40BVH3A2H	3	3.6	48	40	17.3	12.5	12.5	4.5	6.1
GP40BVH3B3H	3	3.6	48	40	36.0	12.5	7.0	3.5	6.1
GP80BVH2A2H	2	2.4	90	80	12.5	16.5	16.5	4.5	7.7
GP80BVH2B2H	2	2.4	90	80	31.5	11.5	7.0	4.5	7.7
GP80BVH3A3H	3	3.6	90	80	19.6	16.5	16.5	4.5	11.7
GP80BVH3B2H	3	3.6	90	80	43.0	11.5	7.0	4.5	11.7

\* Different configurations and capacities are available upon request.

## Major Applications

PC, VCR, desktop PC's, notebooks, PDA and car stereo etc

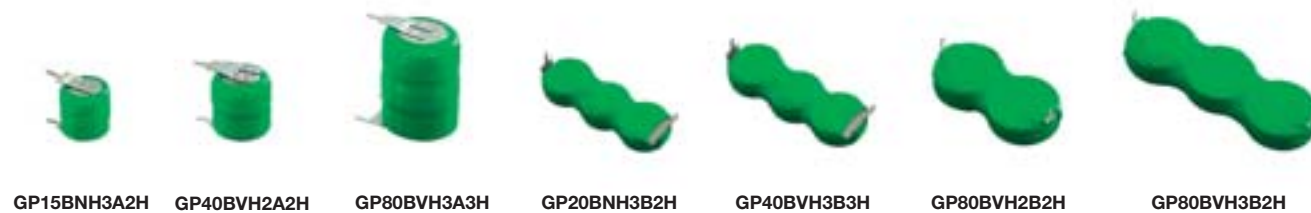

## Bridging Applications

GP Batteries offer reliable and superior power backup for bridging purpose of mobile computers. It acts as an ultimate power supply temporarily during replacement of main battery. Batteries can be equipped with different connectors to suit specific requirement. The configuration of 6 cells together horizontally with connector is widely used in most portable power electronic devices.

## Specifications

GP Model No.	No. of cells	Nominal Voltage (V)	Typical Capacity (mAh)	Nominal Capacity (mAh)	Length (mm)	Width (mm)	Height (mm)	Weight (g)	Wire Length (mm)
<b>Bridging Series</b>									
GP15BNH6BMX	6	7.2	16	15	59.0	13.0	3.4	4.9	35
GP20BNH6BMX	6	7.2	21	20	71.5	14.5	4.0	7.0	35
GP20BNH6SMX	6	7.2	21	20	36.7	14.5	7.0	7.0	20
GP40BVH6BMX	6	7.2	48	40	70.5	13.5	6.7	12.5	43
GP40BVH6WMX	6	7.2	48	40	42.5	22.5	7.5	12.5	60
GP80BVH6BMX	6	7.2	90	80	94.0	17.8	7.0	23.1	60
GP80BVH6SMX	6	7.2	90	80	48.0	18.5	13.2	24.0	60

\* Different configurations and capacities are available upon request.

## Major Applications

Notebooks, palmtops and PDA etc

