


U 75



Universal
 Enclosure with snap lock

Order no.: 06075000

Colour of enclosure group

Lid: light grey, similar to RAL 7035; base graphite grey, similar to RAL 7024; special colours on request

Protection class


Plain: IP 40/DIN EN 60529; with air vents: IP 30/DIN EN 60529

Enclosure material


PS; for details see Technical Information

Scope of delivery: Lid, base

Note: If required, the locking function can be permanently fixed by means of screws.



A	75 mm
B	75 mm
C	40 mm
c1	35 mm

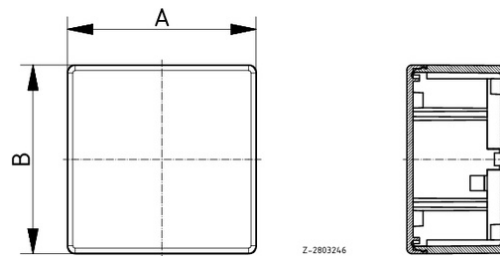

Technical drawings

3D product data in STEP format:

[Registration necessary](#)

Basic drawing for processing work:

[06075000_U-75-G.dxf](#) (538 KB)

Catalogue drawing in DXF format:

[06075000_2802358.dxf](#) (0.9 MB)

Catalogue drawing in PDF format:

[06075000_2802358.pdf](#) (122 KB)

Chapter download

[Element Universal_GB.pdf](#) (386 KB)