

SUMMARY

Wires

| | |
|---------|---|
| Low | 0 |
| High | 0 |
| Coax | 1 |
| Triax | 0 |
| Quad | 0 |
| Fiber | 0 |
| Fluidic | 0 |




Image is for illustrative purpose only

Download

[Request a quote](#)

[Catalog](#)

| | |
|------------------|------------------------|
| Series | 00 |
| Termination type | Coupler/adaptor/bridge |
| IP rating | 50 |
| Cable Ø | 0.00 - 0.00 mm |
| Matching parts | |
| Status | active |
| Alternative part | |

TECHNICAL DETAILS

Mechanics

| | |
|-------------------|--|
| Shell Style/Model | RMA*: Free coupler |
| Keying | Circular (can rotate) |
| Housing Material | Brass (nickel plated) shell, collet nut, latch sleeve and mid pieces |
| Cable Fixing | Ø 0 - 0 mm |
| Variant | |

Performance

| | |
|---------------|------------------------|
| Configuration | 0.25 : 1 Coax (50 Ohm) |
| Insulator | T: PTFE |
| Rated Current | 4 Amps |

Specifications

| |
|------------------------------|
| Contact Type: Coaxial 50 Ohm |
| Max. Matings: 500 |
| Contact Retention: 18 N |

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.


Contact Dia.: 0.7 mm (0.03in)
Vtest: 2100 V (AC), 3000 V (DC)
□
Impedance: 50 Ohm
VSWR: 1.09 + 0.11 * f/GHz

Others

Endurance (Shell): 5000 mating cycles
F ret (min): 100 N
IP Rating: 50

DRAWINGS

Draws

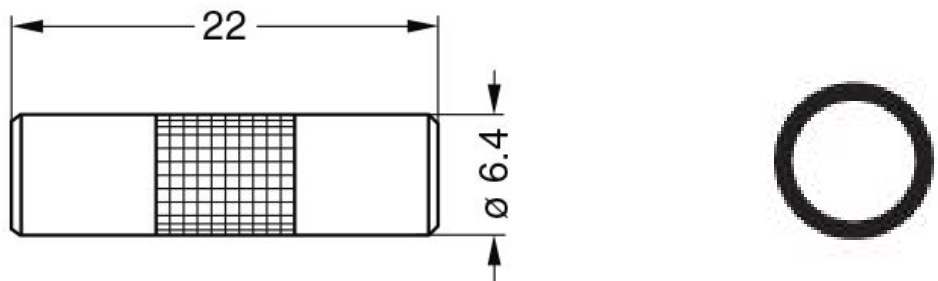

Dimensions

| | A | L | Weight |
|-----|------|------|--------|
| mm. | 6.5 | 22 | 2.7 |
| in. | 0,26 | 0,87 | 0,11 |

RECOMMENDED BY LEMO

Tools

Crimp Tool: DPC.91.701.V

Cables

LEMO products and services are provided “as is”. LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.