

20kV_{DC} - 0.50mm² - PE-X DIELECTRIC COAXIAL HIGH VOLTAGE CABLE

PRODUCT DESCRIPTION

20kV_{DC} coaxial high voltage cable suitable to replace standard 50Ω RG58 coaxial cable in high voltage applications.


It is fully compatible with SHV, MHV and Kings® type coaxial connectors.

Halogen free, flame retardant, low smoke (LSZH/FRNC). RoHS/REACH compliant.

The jacket is resistant against oil, hydrolysis and microbes.

The cable is available on cardboard reels (150m) and wooden reels (1000m).

CONSTRUCTION

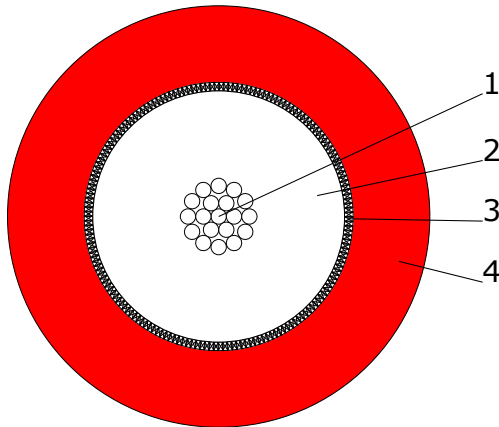

1. Conductor	Cu/Sn (19xAWG33 t.p.c.)	0.50mm ² Ø 0.95mm
2. Dielectric	PE-X	Ø 2.95mm ± 0.05mm
3. Braid	Cu/Sn (0.10mm t.p.c.) 85% Coverage	Ø 3.35mm ± 0.1mm
4. Jacket	TPE-U (PUR)	Ø 4.95mm ± 0.15mm

TECHNICAL DATA

Rated Voltage	20kV _{DC}
Test Voltage	41kV _{DC} / 60s (conductor / braid) 15kV _{AC} (Spark Test, core)
Conductor Resistance @ 20°C	≤ 40Ω/km
Impedance	typ. 50Ω
min. Bend Radius	74mm (moving), 37mm (fixed)
Operating Temperature	-20°C - +105°C
Flame Retardance	according to DIN EN 60332-2-2 (20s)
Weight	ca. 0.032kg/m
Cu-Weight	ca. 0.014kg/m
Color	red
Halogen-free	Yes (LSZH)
RoHS Compliant	Yes
Status	Preferred

Intended for fixed installation; suitable for flexible wiring to a limited extent.

Disclaimer

The information given in this data sheet is technical data, not assured product characteristics. It has been carefully checked and is believed to be accurate; however, no responsibility is assumed for inaccuracies. The user has to ensure by adequate tests that the product is suitable for his application regarding safety and technical aspects.
hivolt.de GmbH & Co. KG does not assume any liability arising out of the application or use of any product described.

Safety Advice

Design, installation and inspection of machinery and devices carrying high voltage require accordingly trained and qualified personnel. Appropriate safety rules and directives must be complied with.

Improper handling of high voltage can mean severe injuries or death and may cause serious collateral damage!