


Product description	Contacts: 4, cable length 2 m, cable: 4 x 0.25, PVC cable sheath, female angled connector, overmoulded, screw type M8x1, with hexagonal die-cast threaded ring
Area	M8 Series 718
Order number	77 3408 0000 20004-0200

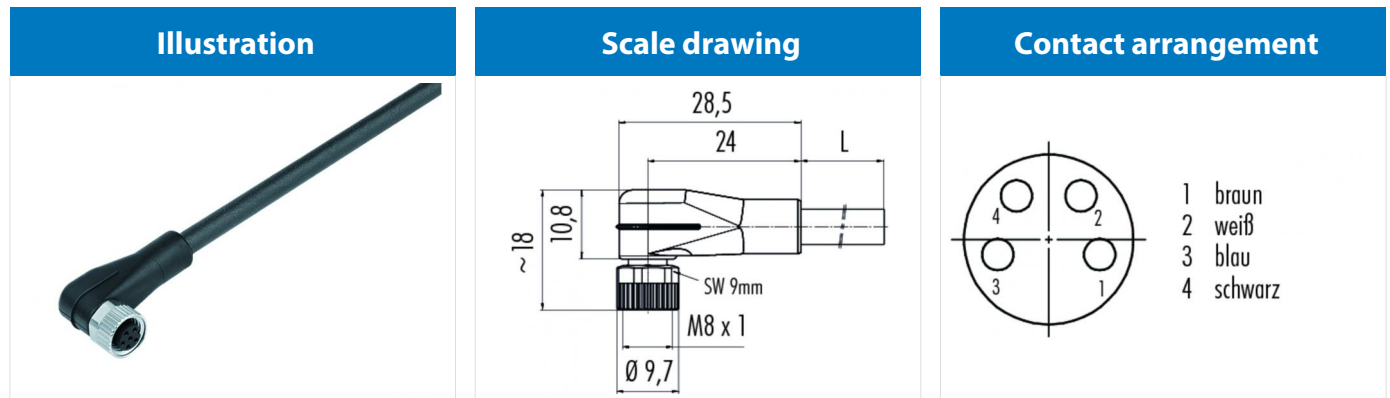

Technical data

General values

Connector design	Winkeldose
Connector locking system	schraub
Termination	crimpen, am Kabel angespritzt
Wire gauge (mm)	0,34 mm ²
Wire gauge (AWG)	(24)
Upper limit temperature	85 °C
Lower limit temperature	-25 °C

Cable data

Sheath material	PVC
Single-lead insulation	PVC
Single-lead structure	42 x 0,1
Cable sheath Ø	4.8
Conductor resistance	57 Ω/Km
Temperature range, moving cable, °C from	-5
Temperature range, moving cable, °C to	105
Temperature range, fixed cable, °C from	-40
Temperature range, fixed cable, °C to	105
Bending radius, fixed cable	min. 5 x D
Bending radius, moving cable	min. 10 x D
Approval 1	UL listed
Cable diameter	4.8

Electrical values

Rated voltage	60 V
Rated impulse voltage	1500 V
Pollution degree	3
Overvoltage category	II
Insulating material group	II
Rated current (40 °C)	4 A
Volume resistivity	≤ 3 mΩ
EMC compliance	nicht geschirmt
Degree of protection	IP67
Mechanical operation	> 100 Steckzyklen

Material

Contact material	CuZn (brass)
Contact plating	Au (Gold)
Contact body material	PUR
Housing material	PUR

Product description	Contacts: 4, cable length 2 m, cable: 4 x 0.25, PVC cable sheath, female angled connector, overmoulded, screw type M8x1, with hexagonal die-cast threaded ring
Area	M8 Series 718
Order number	77 3408 0000 20004-0200

Sicherheitshinweise

The connectors are designed for use in plant, control system and electrical equipment. The end user is responsible for checking whether the connectors are suitable for use in other applications.

Connectors with degree of protection IP 67 and IP 68 are not suitable for use under water. When used outdoors, the connectors must be separately protected against corrosion. For further information about IP degrees of protection refer to 'Technical support' in the Download Centre.

To lock the cable connector to the equipment connector, the threaded ring is tightened until it is 'finger-tight' (approx. 50 cNm).