


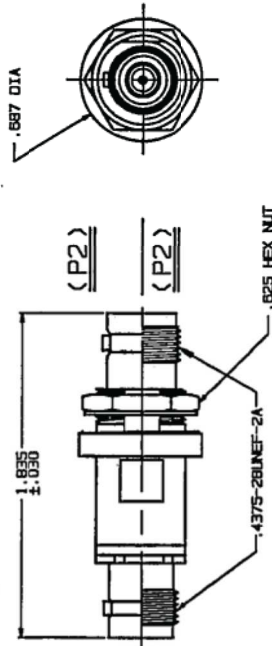
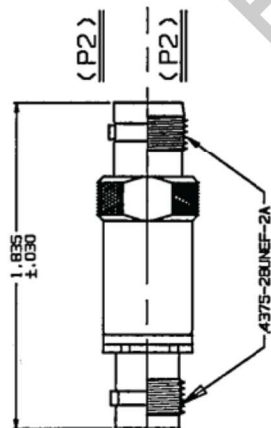

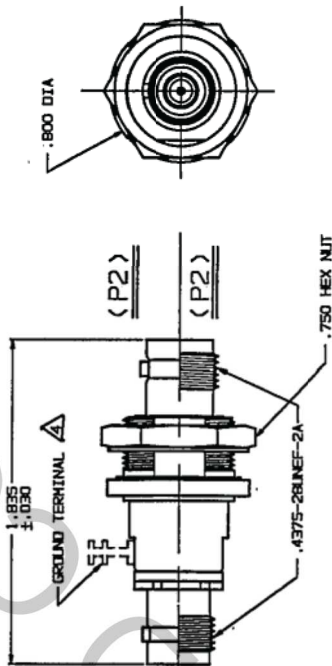



DATA CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO TROPETER ELECTRONICS INC. AND SHALL NOT BE DISCLOSED, COPIED OR USED FOR REPRODUCTION OR MANUFACTURE WITHOUT EXPRESS WRITTEN PERMISSION.

DWG
SIZE

P2 CONN TYPE	P1G NO	P1 CONN TYPE																				P2 CONN TYPE																			
		B120										UR120										B140										UR140									
		SCHEMATICS																				SCHEMATICS																			
		DASH NUMBERS																				DASH NUMBERS																			
		E1	E2	E3	E4	E5	E1	E2	E3	E4	E5	E1	E2	E3	E4	E5	E1	E2	E3	E4	E5	E1	E2	E3	E4	E5															
B174	1A	-1	-2	-3	-4	-059	-5	-6	-7	-8	-170	-9	-10	-11	-12	-13	-14	-15	-16	-172																					
B174TL	1A	-17	-18	-19	-20	-73	-21	-22	-23	-24	-174	-25	-26	-27	-28	-75	-29	-30	-31	-76																					
B174FL	1A	-33	-34	-35	-36	-177	-37	-38	-39	-40	-178	-41	-42	-43	-44	-79	-45	-46	-47	-48																					
B174	1B	-49	-50	-51	-52	-181	-53	-54	-55	-56	-182	-57	-58	-59	-60	-183	-61	-62	-63	-64																					
B174	2A	-65	-66	-67	-68	-185	-69	-70	-71	-72	-186	-73	-74	-75	-76	-187	-77	-78	-79	-80																					
B174TL	2A	-91	-92	-93	-94	-189	-95	-96	-97	-98	-190	-99	-100	-101	-102	-191	-103	-104	-105	-106																					
B174FL	2A	-97	-98	-99	-100	-193	-101	-102	-103	-104	-194	-105	-106	-107	-108	-195	-109	-110	-111	-112																					
B178	2B	-113	-114	-115	-116	-197	-117	-118	-119	-120	-198	-121	-122	-123	-124	-199	-125	-126	-127	-128																					
C170	3A	-129	-130	-131	-132	-199	-133	-134	-135	-136	-200	-137	-138	-139	-140	-201	-141	-142	-143	-144																					
C170L	3A	-149	-150	-151	-152	-203	-153	-154	-155	-156	-207	-157	-158	-159	-160	-211	-161	-162	-163	-164																					
C170	3B	-201	-202	-203	-204	-205	-206	-207	-208	-209	-210	-211	-212	-213	-214	-215	-216	-217	-218	-219																					
C170L	3A	-219	-220	-221	-222	-223	-224	-225	-226	-227	-228	-229	-230	-231	-232	-233	-234	-235	-236	-237																					

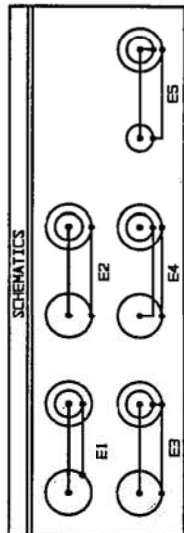

INCH	MM
.005	0.13
.030	0.76
.109	2.77
.140	3.55
.218	5.54
.221	5.61
.261	7.14
.284	7.21
.505	12.03
.510	12.95
.593	15.06
.625	15.88
.630	16.00
.635	16.13
.667	17.45
.750	19.05
.800	20.32
.835	46.61

4 FOR OPTIONAL GROUND TERMINAL, ADD PREFIX "G" TO DASH NO (-G1 ETC)

3. BETWEEN SERIES ADAPTER, 50 & 75 OHM
BNC/TNC COAXIAL JACK TO CONCENTRIC TWINAX/TRIAX INSULATED & NONINSULATED BULKHEAD MOUNT JACK

2. FINISH: TFS-1A (NICKEL)

1. ALL DIM ARE IN INCHES

RECOMMENDED
PANEL CIRCUIT
FOR -55 THRU -128
MAX PNL THK .109

QTY	DESCRIPTION	PART NUMBER	ITEM
10K ± .005 X.XXXX ANGLES	TROMPETER RF connectivity ADAPTERS: W/L 20-40 TO 7/8" SERIES BULKHEAD MOUNT		
DWN DKC B-I-95	MATERIAL	DRAWING NO.	REV
CHK CHK ENGR	14949	12-01	J
APPR	SCALE 2/1	DATE 6/17/85	SHEET 1 OF 2