


Female disconnectors 0.5 – 6 mm²



material: **phos. bronze**, insulation: PA
 surface: tin plated



cross section mm ²	art.- no.	colour of insulation	dimensions in mm				weight 100 pcs./kg	packing unit (pcs.)	tool recommendation
			tab- width	tab- thickness	l1	l2			
0,5 – 1	44080	red	2,8	0,5	18,4	6,4	0,07	100	WZ 9 129
	44081		2,8	0,8	18,4	6,4	0,07	100	
	44083		4,8	0,8	19	6,2	0,08	100	
	44084		6,3	0,8	21	8	0,10	100	
1,5 – 2,5	44087	blue	6,3	0,8	21	8	0,11	100	
4 – 6	44090		6,3	0,8	24,7	8	0,18	100	

Female disconnectors 0.5 – 6 mm², completely insulated

material: **brass**, insulation: PA resp. PC
 surface: tin plated

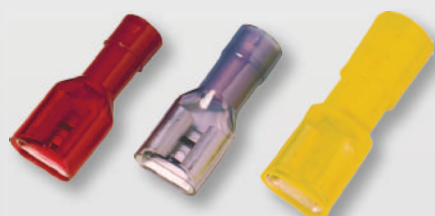

cross section mm ²	art.-no. insulation		colour of insulation	dimensions in mm				weight 100 pcs./kg	packing unit (pcs.)	tool recommendation	
	PA	PC		tab- width	tab- thickness	l1	l2			WZ 43 129	WZ 9 129
0,5 – 1	44040	44640	red	2,8	0,5	19,2	6,4	0,08	100		
	44041	44641		2,8	0,8	19,2	6,4	0,08	100		
	44042	44642		4,8	0,5	20,2	6,4	0,10	100		
	44043	44643		4,8	0,8	20,2	6,4	0,10	100		
	44044	44644		6,3	0,8	21,5	7,3	0,11	100		
1,5 – 2,5	44045	44645	blue	4,8	0,5	20,2	6,5	0,11	100		
	44046	44646		4,8	0,8	20,2	6,5	0,11	100		
	44047	44647		6,3	0,8	21,5	7,3	0,14	100		
4 – 6	44049	44649	yellow	6,3	0,8	24,2	7,3	0,20	100		