Product data sheet


Subminiature connectors




Product description M9 IP67 male panel mount connector, Contacts: 5, shieldable, solder, IP67

Area M9 IP67 series 712 Order number 09 0415 00 05

Illustration





You can find the assembly instructions on the next page.

Technical data

General values

Connector design
Connector locking system
Termination
Wire gauge (mm)
Wire gauge (AWG)
Upper limit temperature
Lower limit temperature
Customs tariff number
Packaging Unit

male panel mount connector screw solder 0.25 mm² 24 85 °C - 40 °C 85369010 50

Electrical values

Rated current (40 °C) 3 A Rated voltage 125 V Rated impulse voltage 1500 V Pollution degree Overvoltage category П Insulating material group $\geq 10^{10} \, \Omega$ Insulation resistance shieldable EMC compliance Degree of protection > 500 Mating cycles Mechanical operation

Material

Contact material CuZn (brass)
Contact plating Au (gold)
Contact body material PA (UL94 V-0)
Housing material CuZn (Brass nickel plated)


Product data sheet

Subminiature connectors



Product description M9 IP67 male panel mount connector, Contacts: 5, shieldable, solder, IP67

Area M9 IP67 series 712 Order number 09 0415 00 05

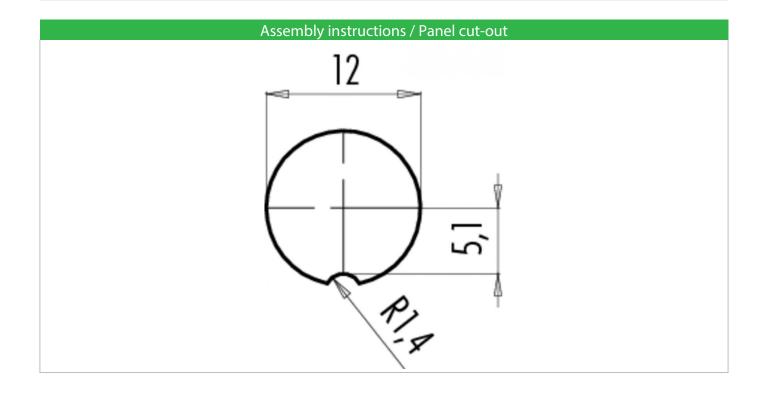

Product data sheet

Subminiature connectors



Product description M9 IP67 male panel mount connector, Contacts: 5, shieldable, solder, IP67

Area M9 IP67 series 712
Order number 09 0415 00 05

Security notices

The connector must not be connected or separated under load. Non-observance and incorrect use can result in personal injury.

The connectors are designed for use in plant, control system and electrical equipment. The end user is responsible for checking whether the connectors are suitable for use in other applications.

Connectors with degree of protection IP 67 and IP 68 are not suitable for use under water. When used outdoors, the connectors must be separately protected against corrosion. For further information about IP degrees of protection refer to 'Technical support' in the Download Centre.