






Gender	Male
Cable termination	IDC
No of contacts	37
Plating shell	Sn
Material contact	Copper alloy
Plating contact	Selective Au
Mounting option DSUB	A0 - No accessories

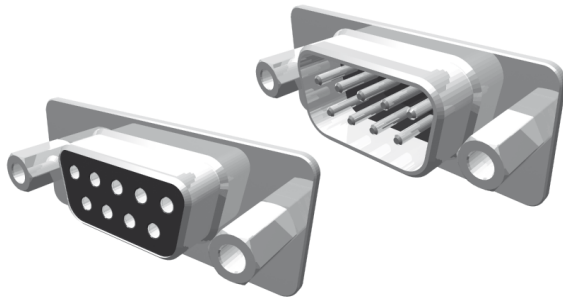

Colour	Black
Material insulator	PBT, UL94V-0
Rated current	3,0 A
Withstand voltage	500 V _{RMS} for 1 minute
Operating temperature	-55°C to +105°C
Packaging	Standard
A	69,32
B	63,50
C	55,42
D	54,84
E	45,72

[RoHS compliant](#)

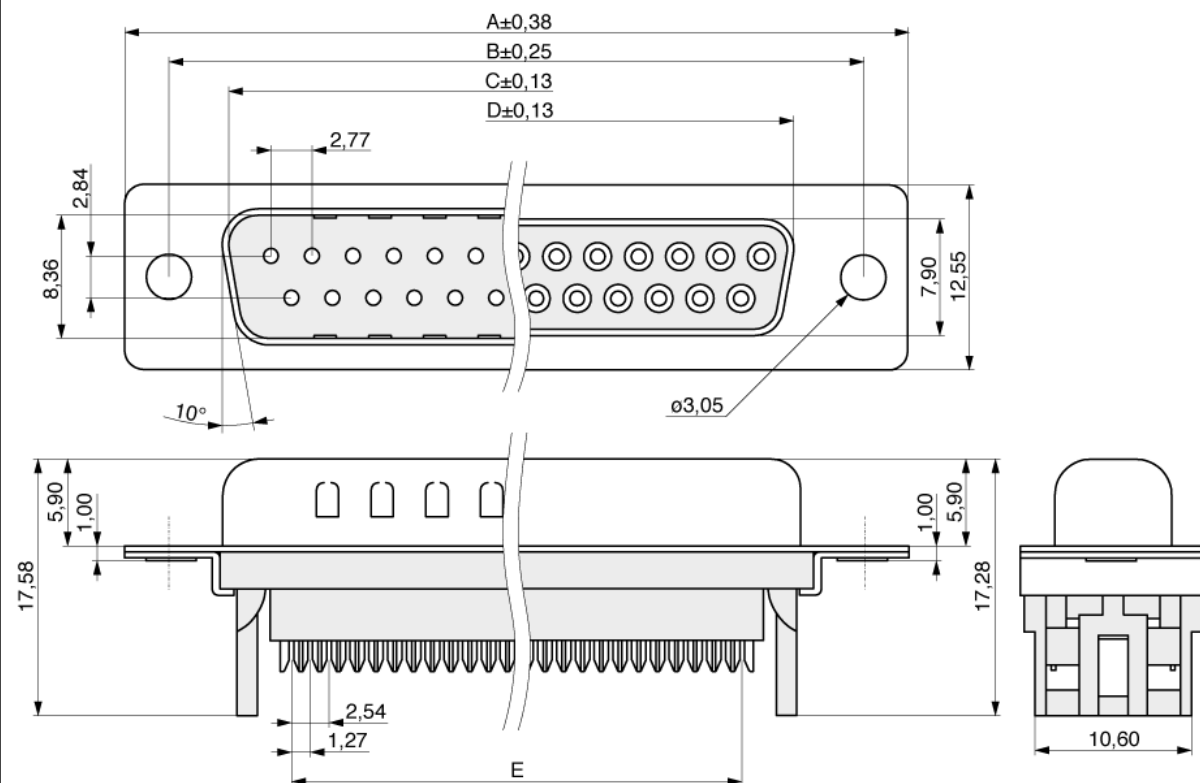

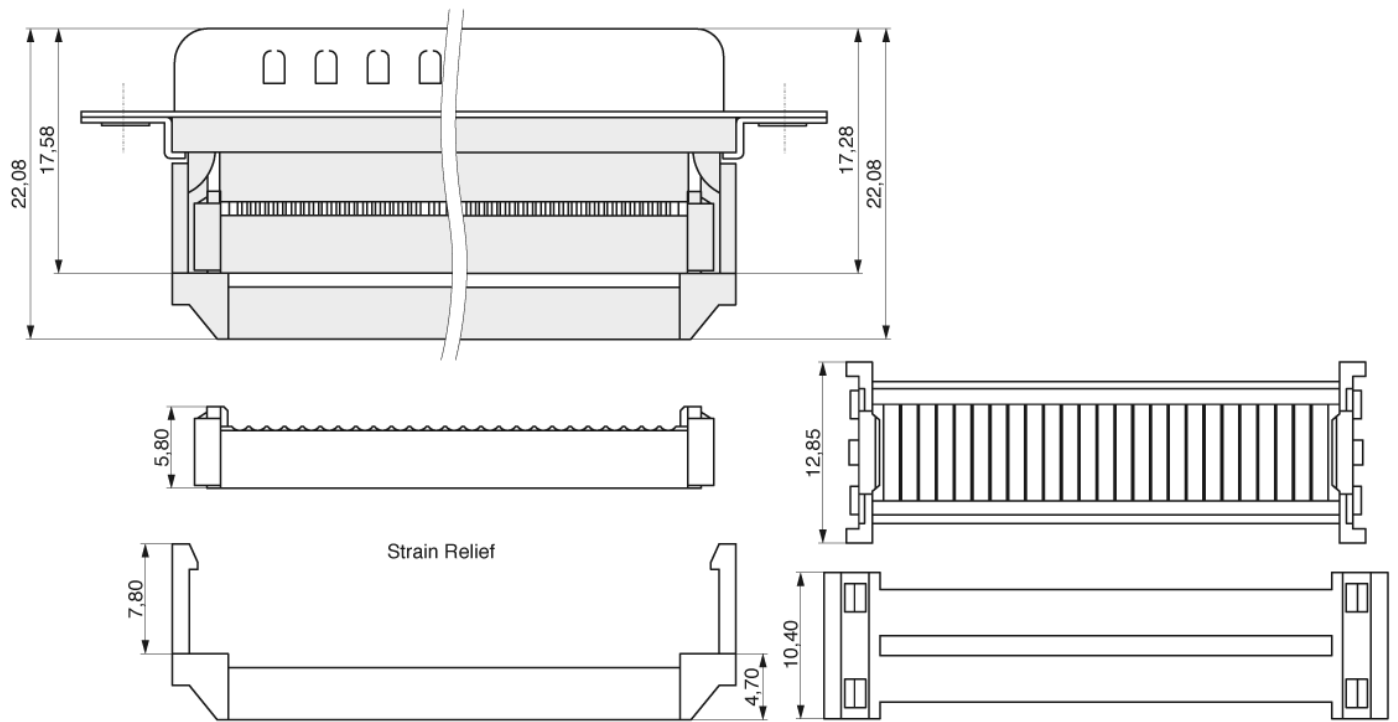

Order code: 706-1-037M-A00TS-BS0



MPE Garry GmbH
Schäfflerstraße 13
87629 Füssen/Germany

Phone: +49 (0) 83 62 / 91 56-0
Fax: +49 (0) 83 62 / 91 56-500
Email: vk@mpe-connector.de

Date: 25.05.2020 Internet: http://www.mpe-connector.de/index.php?lang=en&menu=16&s_product=706-1-037M-A00TS-BS0