
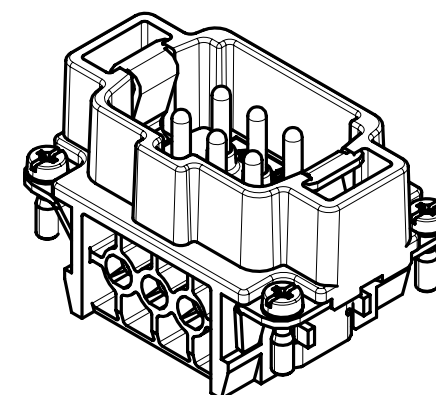
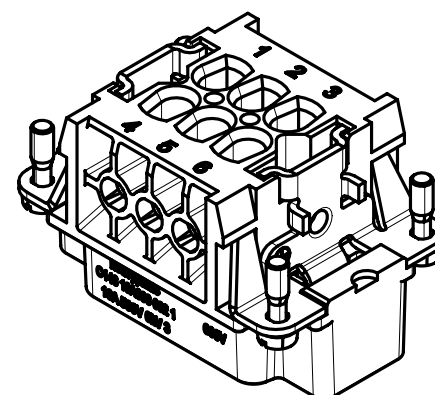
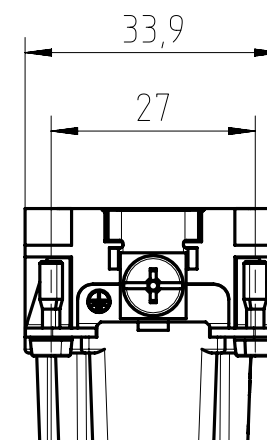
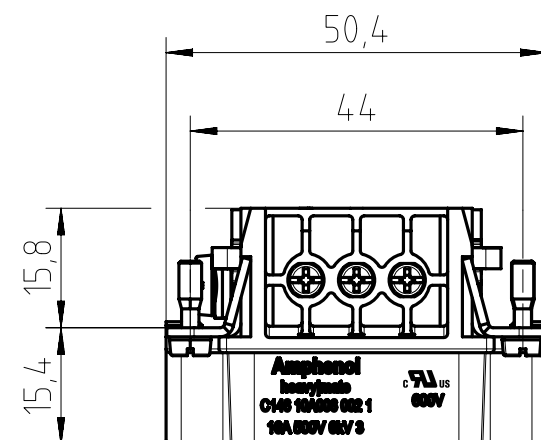


General Characteristics	Standard	Value
number of contacts		6 + PE
termination technique		screw
wire gauge		0,5 mm ² - 4 mm ² AWG 20 - AWG 12
max. insulation diameter		4,6 mm
stripping length		5,5 +0,5 mm
tightening torque		0,5 Nm
flammability	UL 94	V-0
Electrical Characteristics	Standard	Value
rated voltage	IEC 60664-1	500 V (UL/CSA 600 V)
pollution degree	IEC 60664-1	3
installation (overvoltage) category	IEC 60664-1	3
material group	IEC 60664-1	3a
rated impulse withstand voltage	IEC 60664-1	6 kV
rated current T _{amb} = 40 °C		16 A
current carrying capacity	IEC 60512-5-2	see derating curve
contact resistance	IEC 60512-2-1	≤ 5 mΩ
insulation resistance	IEC 60512-3-1	≥ 10 ¹⁰ Ω
Climatical Characteristics	Standard	Value
climatic category	IEC 60068-1	40 / 125 / 21
upper temperature	IEC 60512-11-9	+125 °C
lower temperature	IEC 60512-11-10	-40 °C
Mechanical Characteristics	Standard	Value
mechanical operation	IEC 60512-9-1	≥500 mating cycles
Materials	Standard	Value
insert		PC
contacts		CuZn (brass)
contact plating		Ag (silver)
color		grey

Alle technischen Daten wurden unter Laborbedingungen ermittelt und können im Praxisbetrieb abweichen.
Es handelt sich bei den Angaben weder um Beschaffenheits- noch um Haltbarkeitsgarantien.
All technical data have been measured in a laboratory environment and can be different during
practical usage of the product. Any product information is for descriptive usage only and not legally binding;
particularly the information does not constitute or provide any legal guarantees ("Beschaffenheitsgarantie" or
"Haltbarkeitsgarantie").

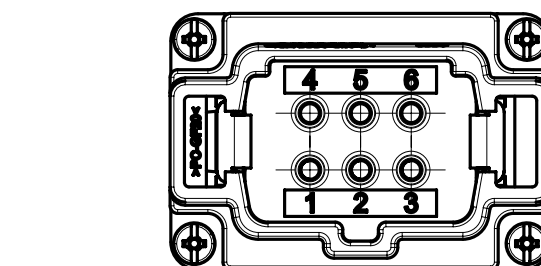

Gewicht (errechnet) / Calc WT: 48,1 g				Zul. Abw./Tolerances:		Maßstab / Scale : 1:1		A3				
Prüfmaß / Testdimension				ISO 2768-m				CUSTOMER DRAWING				
Teileindex / Partindexnumber:						DIN / ISO 13715						
Bagatelle change:												
				Gez.	29.05.2015	Stifteinsatz 6-Pol + PE pin insert 6 pole + PE						
				Drawn	DSC-MIG							
				Status	Released							
				Gepr.	08.08.2018							
				Checked	MGRIMM							
05	201800292	13.07.2018	PWÖLF	Amphenol Tuchel Industrial GmbH		M	C146 10A006 002 1				Blatt/ Sheet	
04	201600249	21.04.2016	PWÖLF								1	
03	201500909	04.03.2016	JHÖNN								1 Bl.	
Index	Änderung/Description		Datum/Date	Name	Ers. f. / Replacement for : M-C146 10A006 002 1 Rev02							

Coping of this document and giving it to others and the use
 or communication of the contents thereof, are forbidden with-
 out express authority. Offenders are liable to the payment of
 damages. All rights are reserved in the event of the grant of
 a patent or the registration of the utility model or design.

Weitergabe sowie Vervielfältigung dieser Unterlage, Verwertung
 und Mitteilung ihres Inhalts nicht gestattet, soweit nicht
 ausdrücklich zugestanden. Zuwiderhandlungen verpflichten
 zu Schadenersatz. Alle Rechte für den Fall der Patenterteilung
 oder Gebrauchsmuster-Eintragung vorbehalten.

F

E

D

C

B

A

FAI2018-003295

NXM-V07