



140-4010 Nylon Movable Bushings (Grommet Edgings)





Cat. No.	D mm	Panel Thickness mm	Std. Pkg. pcs
AMB - 1 N	1	1 ~ 1.1	100
AMB - 1.2N	1.2	1.2 ~ 1.3	
AMB - 1.6N	1.6	1.5 ~ 1.7	
AMB - 2.4N	2.4	2.3 ~ 2.5	

- Material : Nylon PA 66 (UL 94V-2).
- Temperature : - 40 °C to 105 °C (- 40 °F to 221 °F).
- Use in round panel holes.
- Slotted Wall Nylon Grommet Edging for use in cut outs, featuring excellent insulation, durability, resistant to abrasion and will not deteriorate for a long time.

Installs quickly by simply snap into groove.

* Color : Natural. The other colors available upon request. (M.O.Q. required)

140-4020 Movable Bushings (Grommet Edgings)

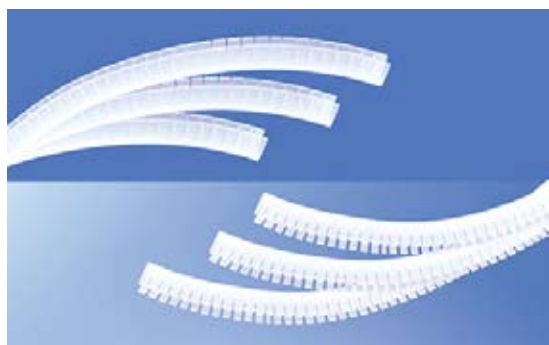


Cat. No.		Panel Thickness mm	Std. Pkg. M
HOLLOWED 	AMB - 1	0.9 ~ 1.1	10
	AMB - 1.2	1.1 ~ 1.3	
	AMB - 1.6	1.4 ~ 1.8	
	AMB - 2	1.8 ~ 2.2	
	AMB - 2.4	2.2 ~ 2.6	
	AMB - 3	2.8 ~ 3.2	
	AMB - 4	3.8 ~ 4.2	
	AMB - 5	4.8 ~ 5.2	
INDENTED 	AMB - 1 S	0.9 ~ 1.1	10
	AMB - 1.2S	1.1 ~ 1.3	
	AMB - 1.6S	1.4 ~ 1.8	
	AMB - 2 S	1.8 ~ 2.2	
	AMB - 2.4S	2.2 ~ 2.6	
	AMB - 3 S	2.8 ~ 3.2	
	AMB - 4 S	3.8 ~ 4.2	
	AMB - 5 S	4.8 ~ 5.2	

- Material : Polyethylene.
- Temperature : - 40 °C to 70 °C (- 40 °F to 158 °F).
- HOLLOWED Types used on curved or straight edges.
- INDENTED Types also can be used on sharp edges.
- Protects and insulates wires and tubings from chafing against sharp edges. Can be cut into any length to apply in holes of any sizes and any shapes. Installs quickly by simply snap into groove.

* Color : Natural. Black is available upon request. (M.O.Q. required)

140-4040 Cords Edge Protectors (Solid Grommet Edgings)



Cat. No.	Panel Thickness mm	Std. Pkg. M
AMB - 1 C	0.9 ~ 1.1	10
AMB - 1.2C	1.1 ~ 1.3	
AMB - 1.6C	1.4 ~ 1.8	
AMB - 2 C	1.8 ~ 2.2	
AMB - 2.4C	2.2 ~ 2.6	
AMB - 3 C	2.8 ~ 3.2	
AMB - 4 C	3.8 ~ 4.2	
AMB - 5 C	4.8 ~ 5.2	
AMB - 6.4C	6.2 ~ 6.6	10
AMB - 8 C	7.8 ~ 8.2	

- Material : Polyethylene.
- Temperature : - 40 °C to 70 °C (- 40 °F to 158 °F).
- Solid Types can be used on sharp edges for framing and binding.
- Protects and insulates wires and tubings from chafing against sharp edges. Installs quickly by simply snap into groove.

* Color : Natural. Black is available upon request. (M.O.Q. required)