


ZT SERIES

Load Life: 125°C 1000~4000 hours, Low Impedance.

◆FEATURES

- Prescribe Impedance value at 100 kHz.
- Load Life : 125°C 1000~4000 hours.
- RoHS compliance.

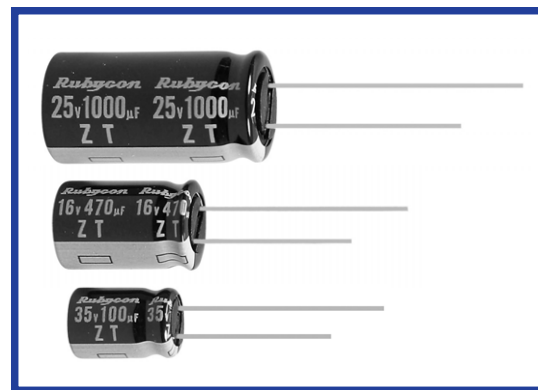

◆SPECIFICATIONS

Items	Characteristics																			
Category Temperature Range	-40~+125℃																			
Rated Voltage Range	10~35V.DC																			
Capacitance Tolerance	±20% (20℃, 120Hz)																			
Leakage Current(MAX)	I=0.03CV or 3μA whichever is greater.(After 2 minutes) I=Leakage Current(μA) C=Capacitance(μF) V=Rated Voltage(V)																			
Dissipation Factor(MAX) (tanδ)	<table border="1"><tr><td>Rated Voltage (V)</td><td>10</td><td>16</td><td>25</td><td>35</td></tr><tr><td>tanδ</td><td>0.20</td><td>0.16</td><td>0.14</td><td>0.12</td></tr></table> (20℃, 120Hz) When capacitance is over 1000μF, tanδ shall be added 0.02 to the listed value with increase of every 1000μF.				Rated Voltage (V)	10	16	25	35	tanδ	0.20	0.16	0.14	0.12						
Rated Voltage (V)	10	16	25	35																
tanδ	0.20	0.16	0.14	0.12																
Endurance	After life test with rated ripple current at conditions stated in the table below at 125℃, the capacitors shall meet the following requirements. <table border="1"><tr><td>Capacitance Change</td><td>Within ±30% of the initial value.</td></tr><tr><td>Dissipation Factor</td><td>Not more than 300% of the specified value.</td></tr><tr><td>Leakage Current</td><td>Not more than the specified value.</td></tr></table> <table border="1"><tr><td>Case Size</td><td>Life Time (hrs)</td></tr><tr><td>ΦD≤ 6.3</td><td>1000</td></tr><tr><td>ΦD=8</td><td>2000</td></tr><tr><td>ΦD= 10</td><td>3000</td></tr><tr><td>ΦD= 12.5</td><td>4000</td></tr></table>				Capacitance Change	Within ±30% of the initial value.	Dissipation Factor	Not more than 300% of the specified value.	Leakage Current	Not more than the specified value.	Case Size	Life Time (hrs)	ΦD≤ 6.3	1000	ΦD=8	2000	ΦD= 10	3000	ΦD= 12.5	4000
Capacitance Change	Within ±30% of the initial value.																			
Dissipation Factor	Not more than 300% of the specified value.																			
Leakage Current	Not more than the specified value.																			
Case Size	Life Time (hrs)																			
ΦD≤ 6.3	1000																			
ΦD=8	2000																			
ΦD= 10	3000																			
ΦD= 12.5	4000																			
Low Temperature Stability Impedance Ratio(MAX)	<table border="1"><tr><td>Rated Voltage (V)</td><td>10</td><td>16</td><td>25</td><td>35</td></tr><tr><td>Z(-25℃)/Z(20℃)</td><td>3</td><td>2</td><td>2</td><td>2</td></tr><tr><td>Z(-40℃)/Z(20℃)</td><td>6</td><td>4</td><td>3</td><td>3</td></tr></table> (120Hz)				Rated Voltage (V)	10	16	25	35	Z(-25℃)/Z(20℃)	3	2	2	2	Z(-40℃)/Z(20℃)	6	4	3	3	
Rated Voltage (V)	10	16	25	35																
Z(-25℃)/Z(20℃)	3	2	2	2																
Z(-40℃)/Z(20℃)	6	4	3	3																

◆MULTIPLIER FOR RIPPLE CURRENT

Frequency (Hz)		120	1k	10k	100k≤
Coefficient	22~33µF	0.20	0.50	0.80	1.00
	39~100µF	0.25	0.60	0.90	1.00
	120~270µF	0.35	0.70	0.92	1.00
	330~680µF	0.45	0.75	0.95	1.00
	820~1800µF	0.50	0.80	0.96	1.00
	2200µF	0.55	0.85	0.98	1.00

◆DIMENSIONS

Technical drawing of a Rubycon ZT capacitor showing side and end views with dimensions.

Side View Dimensions:

- SLEEVE(PET):** Label for the sleeve component.
- $L+a$ MAX:** Maximum length of the sleeve.
- 15MIN:** Minimum length of the sleeve.
- 4MIN:** Minimum length of the lead wire.
- ϕd :** Diameter of the lead wire.

End View Dimensions:

- ϕD :** Diameter of the capacitor body.
- $\phi D+0.5$ MAX:** Maximum diameter of the capacitor body.
- F :** Thickness of the capacitor body.
- ± 0.5 :** Tolerance for the thickness F .

Surface Markings:

- $\oplus$ (plus sign):** Positive terminal marking.
- $\ominus$ (minus sign):** Negative terminal marking.

ϕD	5	6.3	8	10	12.5
ϕd	0.5		0.6		
F	2.0	2.5	3.5	5.0	
a	$L \leq 16 : a = 1.5$		$L \geq 20 : a = 2.0$		

◆OPTION

	Code
PET Sleeve	Blank

◆PART NUMBER

□□□	ZT	□□□□□	M	□□□	□□	DXL
Rated Voltage	Series	Capacitance	Capacitance Tolerance	Option	Lead Forming	Case Size

◆STANDARD SIZE

Rated Voltage (V·DC)	capacitance (μ F)	Size ϕ D×L(mm)	Rated ripple current (mA r.m.s./125°C, 100kHz)	Impedance(Ω MAX)	
				20°C, 100kHz	−10°C, 100kHz
10 (1A)	56	5×11	250	0.40	1.3
	120	6.3×11	405	0.17	0.53
	330	8×11.5	760	0.094	0.29
	470	8×16	995	0.073	0.23
	470	10×12.5	1030	0.069	0.21
	680	8×20	1250	0.054	0.17
	680	10×16	1430	0.050	0.16
	1000	10×20	1500	0.030	0.090
	1200	10×23	1620	0.029	0.086
	1500	12.5×20	1720	0.028	0.069
	2200	12.5×25	1900	0.024	0.059
16 (1C)	47	5×11	250	0.40	1.3
	100	6.3×11	405	0.17	0.53
	220	8×11.5	760	0.094	0.29
	330	8×16	995	0.073	0.23
	330	10×12.5	1030	0.069	0.21
	470	8×20	1250	0.054	0.17
	470	10×16	1430	0.050	0.16
	680	10×20	1500	0.030	0.090
	820	10×23	1620	0.029	0.086
	1000	12.5×20	1720	0.028	0.069
	1500	12.5×25	1900	0.024	0.059
25 (1E)	33	5×11	250	0.40	1.3
	56	6.3×11	405	0.17	0.53
	150	8×11.5	760	0.094	0.29
	220	8×16	995	0.073	0.23
	220	10×12.5	1030	0.069	0.21
	270	8×20	1250	0.054	0.17
	330	10×16	1430	0.050	0.16
	470	10×20	1500	0.030	0.090
	560	10×23	1620	0.029	0.086
	680	12.5×20	1720	0.028	0.069
	1000	12.5×25	1900	0.024	0.059
35 (1V)	22	5×11	250	0.40	1.3
	56	6.3×11	405	0.17	0.53
	100	8×11.5	760	0.094	0.29
	120	8×16	995	0.073	0.23
	150	10×12.5	1030	0.069	0.21
	180	8×20	1250	0.054	0.17
	220	10×16	1430	0.050	0.16
	270	10×20	1500	0.030	0.090
	330	10×23	1620	0.029	0.086
	470	12.5×20	1720	0.028	0.069
	560	12.5×25	1900	0.024	0.059