HDP24-18-14PN ✓ ACTIVE



DEUTSCH | DEUTSCH HD, DEUTSCH HDP

TE Internal #: HDP24-18-14PN

Hybrid, Housing for Male Terminals, Wire-to-Wire, 14 Position, Sealable, Black, Wire & Cable, 13A Contact Current Rating (Max),

Power & Signal

View on TE.com >



Connectors > Automotive Connectors > Connector Housings > DEUTSCH HDP20 HOUSINGS



Connector & Housing Type: Housing for Male Terminals

Mating Pin Diameter: 1.59 mm [.0625 in]

Connector System: Wire-to-Wire

Number of Positions: 14

Sealable: Yes

All DEUTSCH HDP20 HOUSINGS (282)

Features

Product Type Features

Treduct Type I catalies	
Connector & Housing Type	Housing for Male Terminals
Connector System	Wire-to-Wire
Sealable	Yes
Hybrid Connector	No
Primary Locking Feature	Contact Retainer
Connector & Contact Terminates To	Wire & Cable
Configuration Features	
Blank Cavity Position	0
Number of Positions	14
Electrical Characteristics	
Operating Voltage	250 VAC
Nominal Voltage Architecture	12 V, 24 V, 48 V
Body Features	
Cable Exit Angle	180°
Body Material	PA GF

Black

Primary Product Color



Contact Features

Mating Pin Diameter	1.59 mm[.0625 in]
Contact Current Rating (Max)	13 A

Mechanical Attachment

Mounting Feature	With
Terminal Position Assurance	No
Strain Relief	Add By Accessory
Mating Alignment Type	Polarized
Connector Mounting Type	Bulkhead, Cable Mount (Free-Hanging), Panel Mount

Dimensions

Product Width	44.45 mm[1.75 in]
Product Length	41.86 mm[1.648 in]
Product Height	41.28 mm[1.625 in]
Accepts Wire Insulation Diameter Range	2.54 – 3.4 mm[.1 – .134 in]

Usage Conditions

Operating Temperature (Max)	125 °C[257 °F]
Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]

Operation/Application

Circuit Application	Power & Signal
Industry Standards	

Degree of Protection	IP67
UL Flammability Rating	20mm Flame Test per Standard UL-94

Packaging Features

Packaging Method	Box	

Other

Serviceable	Yes
Connector Position Assurance Capable	No

Product Compliance

For compliance documentation, visit the product page on TE.com>



EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2021 (211) Candidate List Declared Against: JUN 2020 (209) SVHC > Threshold: Not Yet Reviewed
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts





















TE Part # 0411-291-1405 EXT TOOL, SIZE 16, 14-16 AWG, N,














Also in the Series | DEUTSCH HD









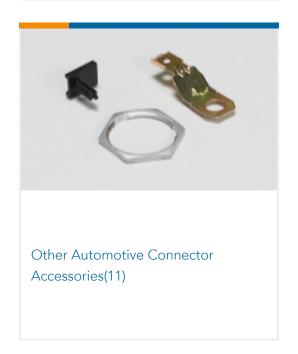

Also in the Series | DEUTSCH HDP






Automotive Connector Caps & Covers (12)



Automotive Housings(289)



Insertion & Extraction Tools(12)

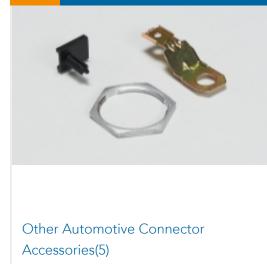

Customers Also Bought













Documents

Product Drawings

REC, 14P, BLK, N, 16, P

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_HDP24-18-14PN_B.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_HDP24-18-14PN_B.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_HDP24-18-14PN_B.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use

Hybrid, Housing for Male Terminals, Wire-to-Wire, 14 Position, Sealable, Black, Wire & Cable, 13A Contact Current Rating (Max), Power & Signal



Datasheets & Catalog Pages

ICT Terminals and Connectors Catalogue

English

CONNECTOR SELECTOR

English

Product Specifications

Application Specification

English