

24 2431


USB and IEEE 1394 connectors



USB 2.0 connecting cable, type A plug to type B plug


State: Obsolete

24 2431

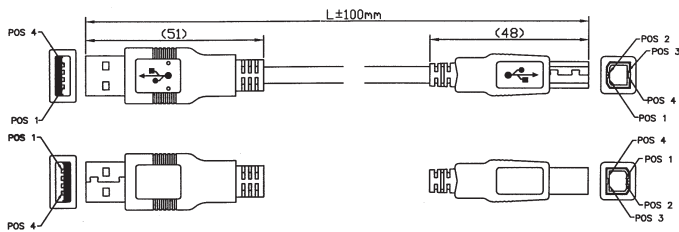

2431 01	UL2725 AWG28 x 1P + AWG24 x 2C + Al-Foil + Drain + Braid
2431 02	UL2725 AWG28 x 1P + AWG24 x 2C + Al-Foil + Drain + Braid
2431 03	UL2725 AWG28 x 1P + AWG24 x 2C + Al-Foil + Drain + Braid
2431 05	UL2725 AWG28 x 1P + AWG20 x 2C + Al-Foil + Drain + Braid

USB PLUG (SERIES A)		USB PLUG (SERIES B)	
1	RED (Vbus)	1	
2	WHITE (Data-)	2	
3	GREEN (Data+)	3	
4	BLACK (GRND)	4	
SHELL	OVERALL SHIELD	SHELL	

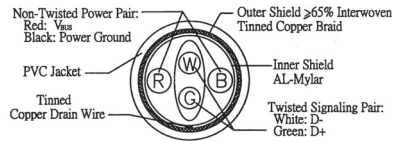

Materials

Overmolding/handle	PVC
--------------------	-----

Connected cable

Construction	USB 2.0 high/full speed UL2725 28 AWG x 1P + 20 AWG x 2C + Al-foil + drain + braid
--------------	---

Electrical data (at T_{amb} 20 °C)

Rated current	1 A
Rated voltage	30 V AC

Associated products

Counterparts

☞ 1673 01	☞ 2410 01	☞ 2410 02
☞ 2410 03	☞ 2410 05	☞ 2410 06
☞ 2410 09	☞ 2410 10	☞ 2411 01
☞ 2411 02	☞ 2411 03	☞ 2411 04
☞ 2420 01	☞ 2483 01	☞ 4512

24

2431

Designation	Pole Number	PU (Pieces)	MDQ (Pieces)	Dimensions L (mm)
2431 01	4	100	200	1000
2431 02	4	100	200	2000
2431 03	4	50	200	3000
2431 05	4	50	200	5000

Packaging:

in bulk, in a cardboard box or a plastic bag