




Connectors > Audio & Video Connectors > USB Connectors

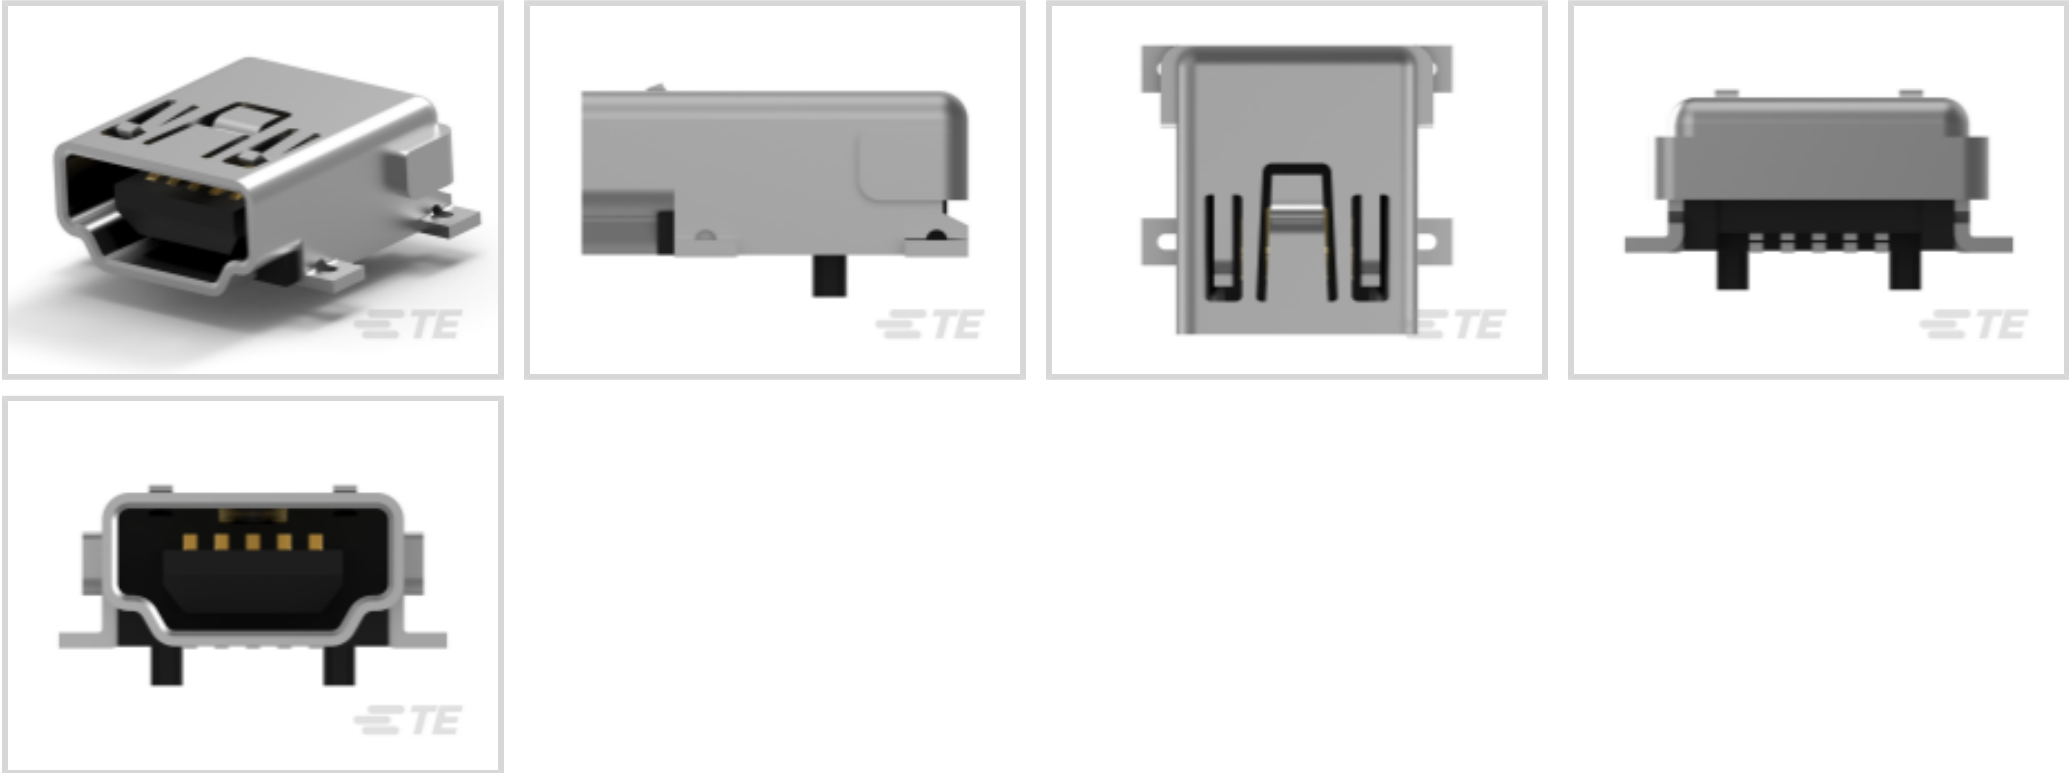

USB Connector Type: **A**

USB Version: **2.0**

Connector Profile: **Mini**

Connector & Housing Type: **Receptacle**

Number of Ports: **1**

Features

Product Type Features

Integral Locking Latch	Without
USB Connector Type	A
USB Version	2.0
Connector & Housing Type	Receptacle
Connector System	Cable-to-Board
Connector & Contact Terminates To	Printed Circuit Board
Product Type	Connector
LED	Without

Configuration Features

Number of Ports	1
Number of Positions	5

Body Features

Offset	0 mm
Connector Profile	Mini



Shell Plating Material	Nickel
------------------------	--------

Contact Features

Contact Current Rating (Max)	1 A
Contact Mating Area Plating Material	Gold Flash over Palladium Nickel
Contact Mating Area Plating Thickness	.76 µm[29.92 µin]

Termination Features

Termination Method to Printed Circuit Board	Surface Mount
---	---------------

Mechanical Attachment

Locking Feature	With
Locating Posts	With
PCB Mount Location	Top
PCB Connector Seating	Flush
PCB Mount Retention Type	SMT Hold-Down
Connector Mounting Type	Board Mount

Housing Features

Body Orientation	Right Angle
Centerline (Pitch)	.8 mm[.031 in]
Housing Material	PA 9T
Housing Color	Black

Dimensions

Tail Length	1.15 mm[.045 in]
PCB Thickness (Recommended)	1.57 mm[.062 in]

Usage Conditions

Soldering Temperature (Max)	260 °C[500 °F]
Mating Cycles (Max)	5000
Operating Temperature Range	-40 – 85 °C[-40 – 185 °F][-40 – 185 °F]

Operation/Application

Halogen Free	No
Circuit Application	Power & Signal

Industry Standards

Moisture Sensitivity Level	1
Industry Standard	USB 2.0



UL Flammability Rating	UL 94V-0
------------------------	----------

Packaging Features

Packaging Method	Tape & Reel
Packaging Quantity	700

Product Compliance


For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2021 (211) Candidate List Declared Against: JAN 2021 (211) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Reflow solder capable to 260°C

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

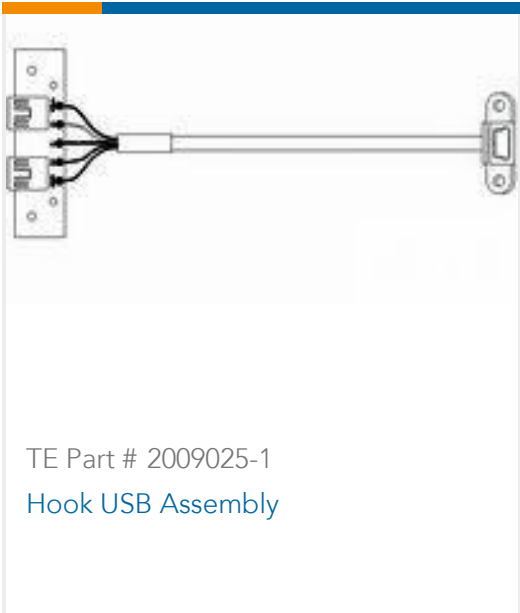





Customers Also Bought




TE Part #1-2199230-5
M.2 CONNECTORS




TE Part #1-1740194-2
D-Sub Receptacle Assy: Eurostyle,
Right Angle, Surface Mount, 2.74mm




TE Part #1735446-6
AMP HPI 2.0MM HEADERS




TE Part #1-2295018-2
USB TYPE C, REC OFFSET 0.65MM
DUAL SMT




TE Part #1734028-1
Std USB Type A, Plug, Natural




TE Part #1676195-2
RN 0805 154R 0.1% 10PPM 1KRL




TE Part #1623799-2
Wirewound Resistor: Horizontal Mount



TE Part #1676281-1
RN 0805 2K05 0.1% 10PPM CUT
LENGTH

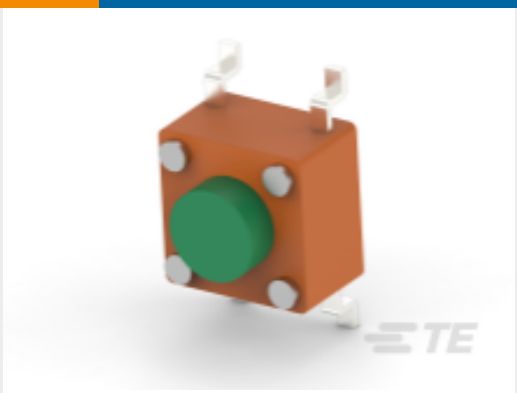

TE Part #1-1977223-0
FSM4JSMASSTR=6MM TACT SWITCH,
SMT 160gf,



TE Part #YDIV40E13-98PNC009
RECP ASSY

Documents

Product Drawings
MINI USB, TYPE A, R/A, SMT
English

CAD Files
3D PDF
3D
Customer View Model
ENG_CVM_CVM_1734327-2_D.2d_dxf.zip
English
Customer View Model
ENG_CVM_CVM_1734327-2_D.3d_igs.zip
English
Customer View Model
ENG_CVM_CVM_1734327-2_D.3d_stp.zip
English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.



Product Specifications

Product Specification

English