



Mini-Fit Connection System

6657TP/6657TR Series Terminals

- * Material : Brass or Phosphor bronze
- * Current rating : 5A, AC/DC
- * Voltage rating : 250V, AC/DC
- * Used in H6657R1, H6657P series housings


inch
mm



E118260



LR82315

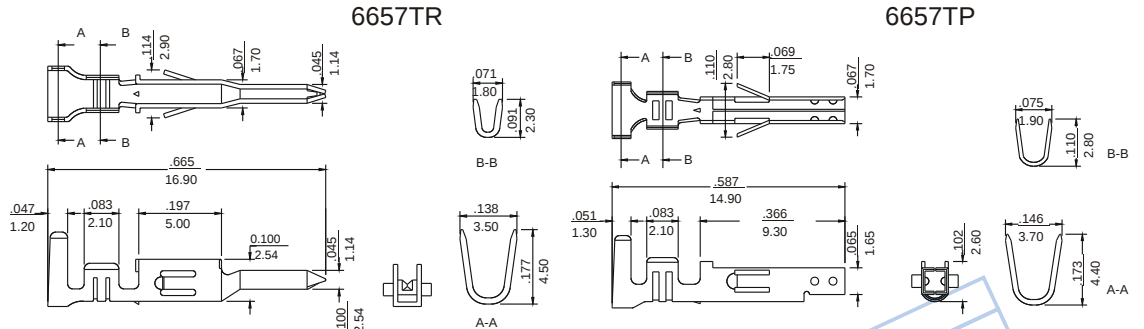

Part No	Wire Range	Insulation O.D.(mm)	Material	Package
6657TP-1	AWG#24-#18	1.3-3.1	Tin-Plated brass	5000PCS/REEL
6657TP-1A	AWG#24-#18	1.3-3.1	Tin-Plated phosphor bronze	5000PCS/REEL
6657TP-2	AWG#26-#22	0.9-1.8	Tin-Plated brass	5000PCS/REEL
6657TP-2A	AWG#26-#22	0.9-1.8	Tin-Plated Phosphor bronze	5000PCS/REEL
6657TP-3	AWG#16	1.8-3.1	Tin-Plated Brass	5000PCS/REEL
6657TP-3A	AWG#16	1.8-3.1	Tin-Plated Phosphor bronze	5000PCS/REEL
6657TR-1	AWG#24-#18	1.3-3.1	Tin-Plated Brass	5000PCS/REEL
6657TR-2	AWG#26-#22	0.9-1.8	Tin-Plated Brass	5000PCS/REEL

H6657R1 Series Receptacle Housings

- * Material : Nylon UL 94V-0 or UL 94V-2
- * Current rating : 5A, AC/DC
- * Voltage rating : 250V, AC/DC
- * Color : Natural
- * Accepts 6657TP terminal
- * Mates with H6657P series plug housings or P6657I, P6657L series headers
- * Dual row , 2-24 circuits available


inch
mm



E118260



LR82315

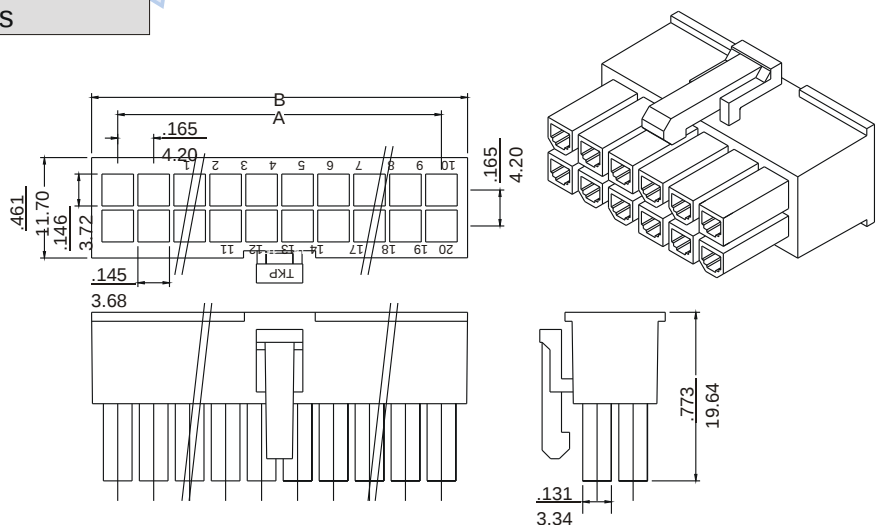

Dimensional information - inch/mm

Circuits		Dim. A		Dim. B		Circuits		Dim. A		Dim. B	
	inch	mm	inch	mm			inch	mm	inch	mm	
2			0.228	5.80	14	0.992	25.20	1.220	31.00		
4	0.165	4.20	0.394	10.00	16	1.157	29.40	1.386	35.20		
6	0.331	8.40	0.559	14.20	18	1.323	33.60	1.551	39.40		
8	0.496	12.60	0.724	18.40	20	1.488	37.80	1.717	43.60		
10	0.661	16.80	0.890	22.60	22	1.654	42.00	1.882	47.80		
12	0.827	21.00	1.055	26.80	24	1.819	46.20	2.047	52.00		