



HDC-CR16-5B GR

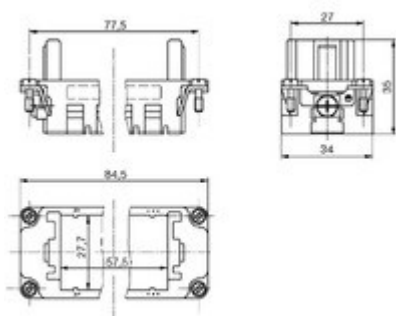

General ordering data

Version	Heavy-duty connectors, HDC insert, ConCept frame
Order No.	1758490000
Type	HDC-CR16-5B GR
GTIN (EAN)	4032248019717
Qty.	5 pc(s).

Dimensions and weights

Depth	84.5 mm
Depth (inches)	3.327 inch
Height	35 mm
Height (inches)	1.378 inch
Width	34 mm
Width (inches)	1.339 inch
Net weight	29.94 g

Temperatures

Limit temperature	-40 °C ... 125 °C
-------------------	-------------------

Environmental Product Compliance

REACH SVHC	Potassium perfluorobutane sulfonate 29420-49-3
SCIP	2f94735a-9fba-4903-842f-4fb9aa902310

ConCept Pneumatic module

Colour	beige
UL 94 flammability rating	V-0

Dimensions

Height of socket	35 mm
Total length base	84.5 mm
Width	34 mm

General data

BG	6
Colour	beige
Free from halogens	false
Low smoke acc. DIN EN 45545-2	Yes
Material	Polycarbonate
Number of poles	1
Series	ConCept frame
Size	6
Type	Female
UL 94 flammability rating	V-0

Connection data PE

Connection type PE	Screw connection
Tightening torque, max. PE connection	1.5 Nm
Tightening torque, min. PE connection	1.2 Nm

Version

BG	6
Material	Polycarbonate
Size	6
Wire connection cross section AWG, max.	AWG 14

Downloads

Engineering Data	<u>CAD data -- STEP</u>
CADENAS eCATALOG	<u>CAX data</u>
Catalogues	<u>Catalogues in PDF-format</u>
Brochures	<u>FL FIELDWIRING EN</u>

Classifications

ETIM 6.0	EC002312
----------	----------

ETIM 7.0	EC002312
ETIM 8.0	EC002312
ETIM 9.0	EC002312
ECLASS 9.0	27-44-02-06
ECLASS 9.1	27-44-02-06
ECLASS 10.0	27-44-02-06
ECLASS 11.0	27-44-02-06
ECLASS 12.0	27-44-02-92
ECLASS 13.0	27-44-02-92

Approvals

ROHS	Conform
------	---------

Related products: